



Mod²™ Family


NEW: 4600/7200

- PENDANT DIRECT
- PENDANT INDIRECT/DIRECT
- PENDANT SEMI-DIRECT
- SURFACE DIRECT
- WALL INDIRECT/DIRECT

LITECONTROL

Mod²™ Family . . . a new generation!

The Mod² Family is the latest generation of an "industry standard" Mod fixture design from Litecontrol. Mod² represents an evolution in design and performance. Mods are now available in a small fixture cross-section for suspended, surface, and wall applications. A complete set of options from lamp types to diffusers, suspensions to custom finishes, add to the versatility of the new Mod design.

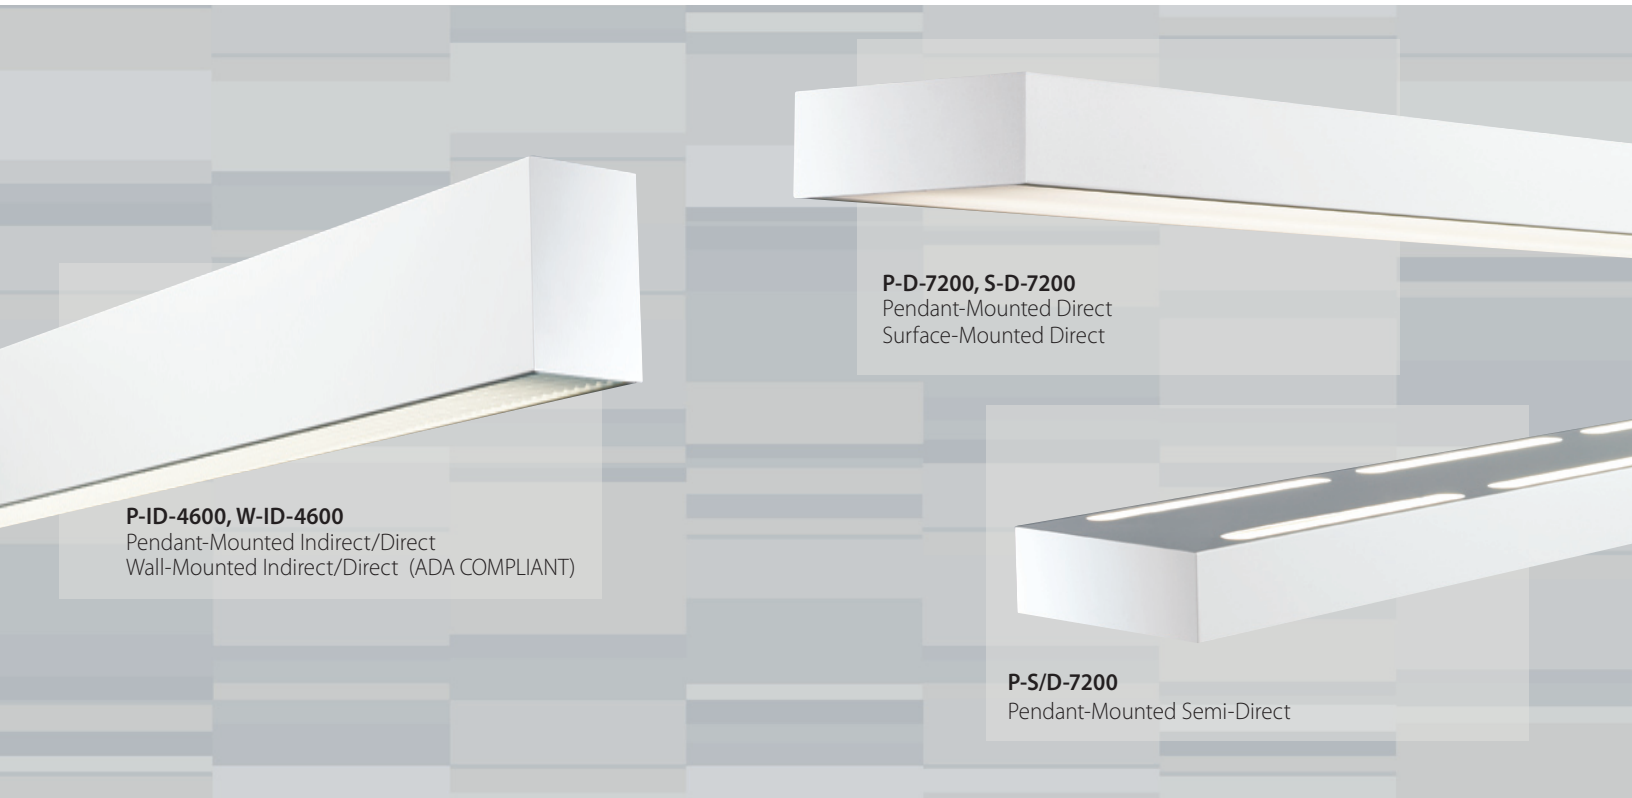

P-ID-4600, W-ID-4600
Pendant-Mounted Indirect/Direct
Wall-Mounted Indirect/Direct (ADA COMPLIANT)

P-D-7200, S-D-7200
Pendant-Mounted Direct
Surface-Mounted Direct

P-S/D-7200
Pendant-Mounted Semi-Direct

Features	Benefits
Full family offering: surface-, pendant-, and wall-mounted fixtures	Meets requirements for broad range of applications
2-, 3-, and 4-lamp T8, T5, or T5HO	Provides various lumen packages to meet different light-level needs
Indirect/Direct, Semi-Direct, and Direct	Offers variety of distributions in a small scale rectilinear style for design continuity across different spaces on a job
Three diffuser options	Allows for selection of fixtures' visual appearance to meet interior design objectives
Lift-and-shift diffusers	Enables easy, tool-free diffuser insertion and removal, especially for re-lamping and cleaning
Pre-wiring and quick connects	Simplifies installation and fixture joining
System connectors	Offers greater flexibility in layout design
Aircraft cable and stem-mount suspension options	Provides choices for suspension appearance or to meet mounting code requirements
21 Litecolors and custom colors available	Gives unlimited customization of fixture appearance to tie into or define an interior's color scheme

Diffuser Choices




SGL Soft Glow Lens. Frosted acrylic lens provides a diffused glow for a continuous-line-of-light aesthetic.

BA Blade Baffle, Metallic Gray. Blade baffle provides low-brightness, well-shielded appearance.


BW Blade Baffle, White. Provides a bright, open look.

Distribution Choices


P-D-7200 & S/D-7200

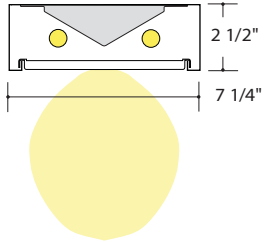


P-S/D-7200

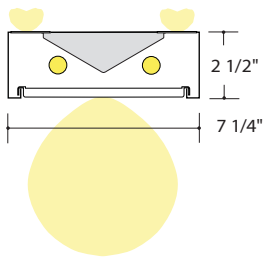

W-ID-4600

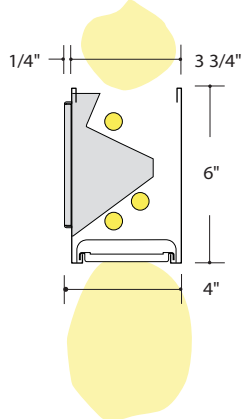

P-ID-4600

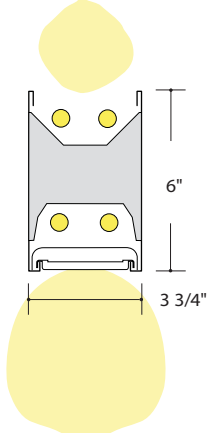

P-ID-4600 with standard Matte White (CWM) finish, SGL lens. Matouk, Fall River, MA

Mod² Family 4400 and 4500



LG-D-4400, LG-D-4500



P-D-4400, S-D-4400,
W-D-4400, P-S/D-4400



R-D-4400, R-D-4500
RP-D-4400

Also part of the Mod² Family are the Recessed-, Pendant-, and Surface-Mounted 4400 and 4500 series.

Visit us online at litecontrol.com for complete ordering and technical information.

Use our convenient Quick Find feature.




Mod²™ Family

For complete ordering and technical information, including photometric report summaries, please see Technical Sheets online at litecontrol.com for all Mod² product types.

Ordering guide: 4600 Pendant-Mount


Product, lamping, & length									Options						
P -	ID -	46	4	8	T5	/2	8	T5 -	SGL -	CWM -	--	LP/ELB -	2CWQ -	LP/EF -	120
Mounting	Distribution	Series	Lamp Count (Indirect)	Nominal Length (ft)	Indirect Lamp Type	Lamp Count (Direct)	Nominal Length (ft)	Direct Lamp Type	Diffuser	Finish	Tandem Wiring	Ballasts	Pre-Wiring	Other options	Volts
P Pendant-Mounted	ID Indirect/Direct	46	1,2 →	3 →	T8	1,2 →	3 →	T8	BA BW SGL	CWM (Matte White) is standard see <i>LiteColors</i> ™ in Product Guide for other finishes	-- →	ELB is std for T8 LP/ELB is std for T5 or T5HO DA/ELB HEL/ELB ECO/ELB	1CWQ	LP/EF F	120 277
			1,2 →	4 →	T5HO	1,2 →	4 →	T5HO			2CWQ				
			2,4 →	6 →	T5	2,4 →	6 →	T5			--				
			2,4 →	8 →		2,4 →	8 →				TW* →				

Click on **Quick Find**  **46 id**
litecontrol.com

* For Tandem Wiring (TW) (to switch in-line lamps separately) of just the direct lamps or just the indirect lamps, please consult factory. Specific wiring information will be required to complete specification. Total number of circuits may result in additional or special wiring conditions.


Ordering guide: 4600 Wall-Mount

Product, lamping, & length						Options						
W -	ID -	46	4	8	T5 -	BW -	CWM -	TW -	LP/ELB -	2CWQ -	LP/EF -	120
Mounting	Distribution	Series	Lamp Count	Nominal Length (ft)	Lamp Type	Diffuser	Finish	Tandem Wiring	Ballasts	Pre-Wiring	Other options	Volts
W- Wall-Mounted	ID Indirect/Direct	46	1,2,3 →	2 →	T8	BA BW SGL	CWM (Matte White) is standard see <i>LiteColors</i> ™ in Product Guide for other finishes	-- →	ELB is std for T8 LP/ELB is std for T5 or T5HO DA/ELB HEL/ELB ECO/ELB	1CWQ	LP/EF F ILO/XA ILO/PAT 19 ILO/FP	120 277
			1,2,3 →	3 →				TW →		2CWQ		
			1,2,3 →	4 →								
			2,4,6 →	6 →								
			2,4,6 →	8 →								
			1,2 →	3 →				T5HO T5				
			1,2,3 →	4 →								
			2,4 →	6 →								
			2,4,6 →	8 →								

Click on **Quick Find**  **46 wid**
litecontrol.com

Ordering guide: 7200 Pendant- and Surface-Mount

Product, lamping, & length						Options									
P -	D -	72	4	8	T8 -	BW -	CWM -	TW -	ELB -	2CWQ -	LP/EF -	120			
Mounting	Distribution	Series	Lamp Count	Nominal Length (ft)	Lamp Type	Diffuser	Finish	Tandem Wiring	Ballasts	Pre-Wiring	Other options	Volts			
P Pendant-Mounted	D Direct	72	2 →	2 →	T8	BA BW SGL	CWM (Matte White) is standard see <i>LiteColors</i> ™ in Product Guide for other finishes	-- →	ELB is std for T8 LP/ELB is std for T5 or T5HO DA/ELB HEL/ELB ECO/ELB	1CWQ	LP/EF F	120 277			
			2 →	3 →				TW →		2CWQ					
			2 →	4 →											
			4 →	6 →											
	S Surface-Mounted		D Direct	4 →	8 →			T5HO T5		2 →			3 →		
				2 →	4 →										
				4 →	6 →										
				4 →	8 →										

Click on **Quick Find**  **72d
72sd
72psd**
litecontrol.com

LITECONTROL . . . an employee owned company

100 HAWKS AVENUE HANSON MA 02341 781 294 0100 FAX 781 293 2849 info@litecontrol.com litecontrol.com

