



Project Name \_\_\_\_\_ Qty \_\_\_\_\_

Type \_\_\_\_\_ Catalog / Part Number \_\_\_\_\_

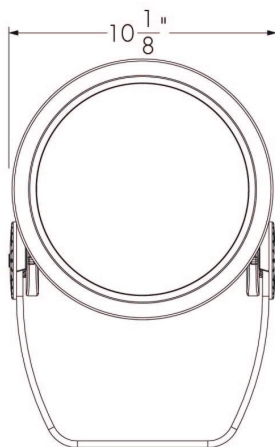

Front view

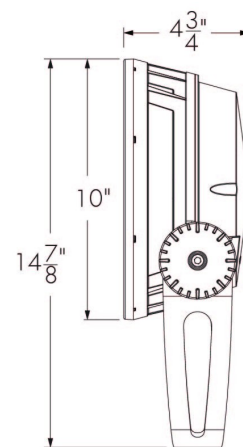

Side view

**Photometric Summary (Discrete)**

**Symmetric**

	Delivered output (lm)	Intensity (peak cd)
<b>VN (6°)</b>	2,402	125,148
<b>NS (10°)</b>	2,572	91,221
<b>NF (20°)</b>	2,541	23,829
<b>M (30°)</b>	2,323	10,502
<b>FL (40°)</b>	2,190	5,407
<b>WFL (60°)</b>	1,817	1,886

**Asymmetric**

<b>NAS</b>	2,672	41,158 (@2.5°)
<b>WW</b>	2,213	9,834 (@5°)

Based on RGBW40K full output, DMX/RDM configuration. Photometric performance is measured in compliance with IESNA LM-79-08.


**Photometric Summary (Opticolor)**

**Symmetric**

	Preliminary Data	
	Delivered output (lm)	Intensity (peak cd)
<b>NS (10°)</b>	1,700	23,954
<b>NF (20°)</b>	1,690	12,601
<b>M (30°)</b>	1,711	7,307
<b>FL (40°)</b>	1,711	4,155
<b>WFL (60°)</b>	1,705	1,616

Based on MRGBW40K full output, DMX/RDM configuration. Photometric performance is measured in compliance with IESNA LM-79-08.

**Optics**

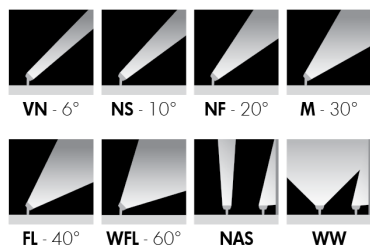

**Description**

The Lumenbeam Large Colour Changing is an IP66-rated luminaire for lighting landscapes, trees, columns, monuments, and architectural details. The system offers numerous options including optics for flood or accent lighting, a choice of color mixing, as well as various accessories, spread lenses, and controls. The luminaire also has an anti-corrosion option for use in harsh, chemical, or coastal environments.

**Features**

**Colors and Color Temperature (Discrete)** RGB, RGB + white 3000K, RGB + white 4000K, RGB + amber

**Colors and Color Temperature (Opticolor)** Opticolor cluster with MRGBW (red, green, blue, white 3000K), Opticolor cluster with MRGBW (red, green, blue, white 4000K), Opticolor cluster with MRGBA (red, green, blue, amber), MRGBW30K and MRGBW40K can be configured to MRGB via RDM (consult factory for more details)

**Optics (nominal distribution)** VN (6°), NS (10°), NF (20°), M (30°), FL (40°), WFL (60°), NAS (Narrow Asymmetric), WW (Asymmetric Wallwash)

**Optical Option** Linear spread lens horizontal distribution, Linear spread lens vertical distribution

**Options** Short Yoke, 3G ANSI C136.31-2010 Vibration Rating for bridge applications, Corrosion-resistant coating for hostile environments

**Cable Color** Black, White

**Power Consumption** 50 W

**Warranty** 5-year limited warranty

**Performance**

**Maximum Delivered Output (Discrete)** 2,664 lm (RGB full output, NAS @ 2.5°, DMX/RDM), 2,619 lm (RGBW30K full output, NAS @ 2.5°, DMX/RDM), 2,672 lm (RGBW40K full output, NAS @ 2.5°, DMX/RDM), 2,168 lm (RGBA full output, NAS @ 2.5°, DMX/RDM)

**Colors and Color Temperatures**



**Controls**



**Ratings**

IP66 IK10

**Certifications**



**Maximum Delivered Output (Opticolor)** 1,677 lm (MRGBW30K full output, M 30°, DMX/RDM), 1,711 lm (MRGBW40K full output, M 30°, DMX/RDM), 1,386 lm (MRGBA full output, M 30°, DMX/RDM)

**Maximum Delivered Intensity (Discrete)** 124,768 cd at nadir (RGBA full output, VN 6°, DMX/RDM), 122,645 cd at nadir (RGBW30K full output, VN 6°, DMX/RDM), 125,148 cd at nadir (RGBW40K full output, VN 6°, DMX/RDM), 101,519 cd at nadir (RGBA full output, VN 6°, DMX/RDM)

**Maximum Delivered Intensity (Opticolor)** 23,475 cd at nadir (MRGBW30K full output, NS 10°, DMX/RDM), 23,954 cd at nadir (MRGBW40K full output, NS 10°, DMX/RDM), 19,403 cd at nadir (MRGBA full output, NS 10°, DMX/RDM)

**Illuminance at Distance (Discrete)** Minimum 1 fc at 353 ft (RGB full output, VN 6°, DMX/RDM), Minimum 1 fc at 350 ft (RGBW30K full output, VN 6°, DMX/RDM), Minimum 1 fc at 354 ft (RGBW40K full output, VN 6°, DMX/RDM), Minimum 1 fc at 319 ft (RGBA full output, VN 6°, DMX/RDM)

**Illuminance at Distance (Opticolor)** Minimum 1 fc at 153 ft (MRGBW30K full output, NS 10°, DMX/RDM), Minimum 1 fc at 155 ft (MRGBW40K full output, NS 10°, DMX/RDM), Minimum 1 fc at 139 ft (MRGBA full output, NS 10°, DMX/RDM)

**Lumen Maintenance** L70 120,000 hrs (Ta 25 °C)

**Physical**

**Housing Material** Low copper content high pressure die-cast aluminum

**Yoke Material** Heavy aluminum (standard yoke included)

**Lens Material** Clear tempered glass

**Hardware Material** Stainless steel

**Gasket Material** Silicone

**Surface Finish** Electrostatically applied polyester powder coat

**Weight** 12 lbs

**EPA** Front = 0.64 sq ft, Side = 0.21 sq ft

**Electrical and control**

**Voltage** 100 to 277 volts

**Fixture Cable** Power and data in one cable

**Conductors** 3C #16-3 (LT control), 5C #16-5 (DALI8 control), 6C #14-3/ #24-3 (DMX/RDM control)

**Control** Lumentalk, DMX/RDM enabled, DALI-2 dimming Type 8

**Resolution (DMX/RDM)** Per fixture, 8-bit or 16-bit, 3 channels (RGB) or 4 channels (RGBW30K, RGBW40K, RGBA, MRGBW30K, MRGBW40K, and MRGBA)

**RGB Color Mixing** 36 LEDs (12x Red, 12x Green, 12x Blue)

**RGBW30K Color Mixing** 28 LEDs (7x Red, 7x Green, 7x Blue, 7x White 3000K)

**RGBW40K Color Mixing** 28 LEDs (7x Red, 7x Green, 7x Blue, 7x White 4000K)

**RGBA Color Mixing** 28 LEDs (7x Red, 7x Green, 7x Blue, 7x Amber)

**MRGBW30K Color Mixing** 56 LEDs in 14 clusters (1x Red, 1x Green, 1x Blue, 1x White 3000K per cluster), Consult factory for more color and CCT options available

<b>MRGBW40K Color Mixing</b>	56 LEDs in 14 clusters (1x Red, 1x Green, 1x Blue, 1x White 4000K per cluster), Consult factory for more color and CCT options available
------------------------------	--

<b>MRGBA Color Mixing</b>	56 LEDs in 14 clusters (1x Red, 1x Green, 1x Blue, 1x Amber per cluster), Consult factory for more color and CCT options available
---------------------------	--

**Environmental**

<b>Storage Temperature</b>	-40 °F to 158 °F (device must reach start-up temperature value before operating)
----------------------------	--

<b>Start-up Temperature</b>	-13 °F to 122 °F
-----------------------------	------------------

<b>Operating Temperature</b>	-40 °F to 122 °F
------------------------------	------------------

<b>Ingress Protection Rating</b>	IP66, Wet location rated
----------------------------------	--------------------------

<b>Impact Resistance Rating</b>	IK10
---------------------------------	------

<b>Application Wind Speed</b>	Luminaires were designed based on AASHTO 2013 standard to ensure highest quality and safety. Installation should be validated by a local project engineer to ensure the luminaires are suitable for the wind speed and exposure of the specific application
-------------------------------	---

**Accessories (order separately)**

<b>Optical Accessories</b>	Snoot, Snoot wide, Visor, Linear Spread Lens Adjustable, Wire guard
----------------------------	---


<b>Control Boxes</b>	DMX/RDM enabled (daisy chain or star configuration), Ethernet enabled (daisy chain or star configuration)
----------------------	---

<b>Control Systems</b>	Lumentone™ 2 (LTN2), Pharos® kit (PHAROS)
------------------------	---

<b>Diagnostic and Addressing Tools</b>	LumenID (LID), LumentalkID
--	----------------------------

**Color point information**


**MRGBW40K**

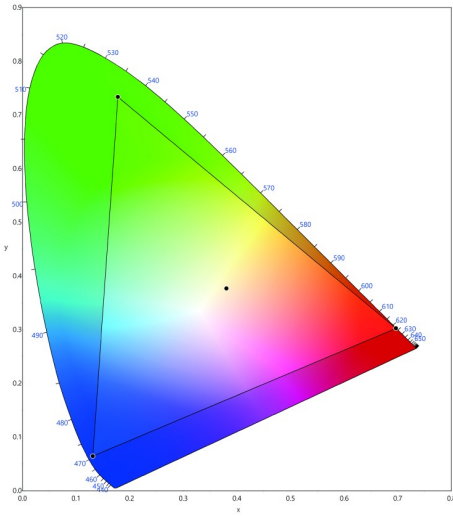


Red: 620-625nm  
Green: 528-533nm  
Blue: 465-470nm

**Mounting options**

**SY - Short yoke**




Front view




Side view

**Mounting details**


**Mounting hole pattern - standard and short yoke**



**Adjustable pivot limits**

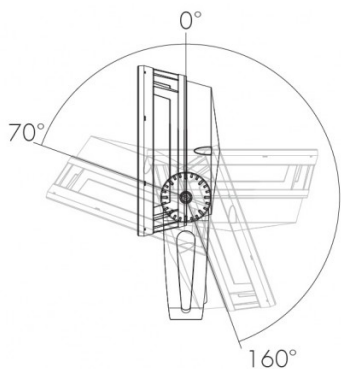

Standard yoke

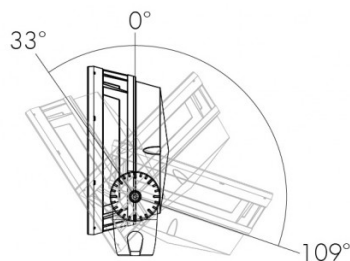

Short yoke

**Optical options**

**LSLH - Linear spread lens horizontal distribution**



LSLH - Linear spread lens horizontal distribution

**LSLV - Linear spread lens vertical distribution**



Factory installed, not adjustable on site. Not available for WFL, NAS and WW optics.  
See 'Optical Accessories' section for field adjustable spread lens (LSLA).

**Beam angles**


Optic installed in fixture	Beam angle with LSLH/LSLV
<b>VN</b>	7° x 60°
<b>NS</b>	13° x 66°
<b>NF</b>	16° x 62°
<b>M</b>	23° x 65°
<b>FL</b>	33° x 70°

LLF: 0.88\*


\*LLF may vary slightly by distribution chosen.

**Mounting accessories (order separately)**


**Round pole mounting accessory**

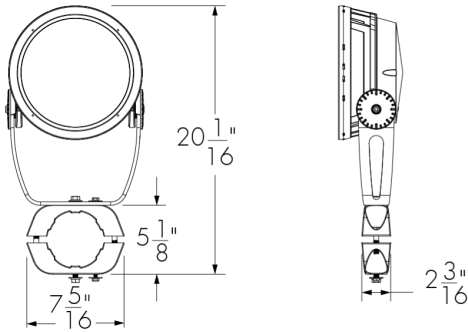

PM4 model shown. Consult factory for square pole section.



**PM4-1, PM4.5-1, PM5-1** - Round pole mounting accessory - single fixture




**PM4-2, PM4.5-2, PM5-2** - Round pole mounting accessory - twin fixtures  
\*One bracket assembly is supplied per 2 fixtures unless otherwise specified.

	PM4	PM4.5	PM5
<b>For pole Ø</b>	4" ± 1/16"	4.5" ± 1/16"	5" ± 1/16"

Consult factory for other pole diameters.


**UY - Universal yoke for Lumentech pole**

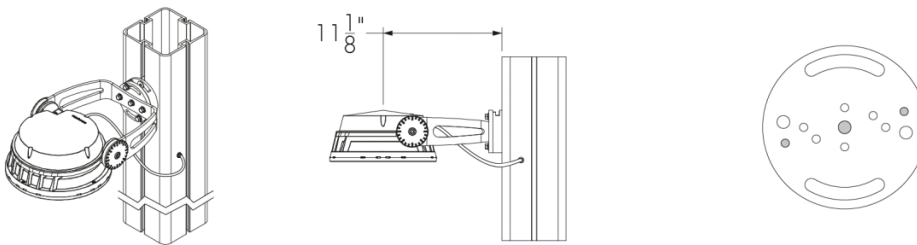


Square Lumentech profile shown. Refer to Lumentech specification sheet and installation instructions for more details.

The mounting holes used for this fixture are shown in gray.

**Tenon adapter**

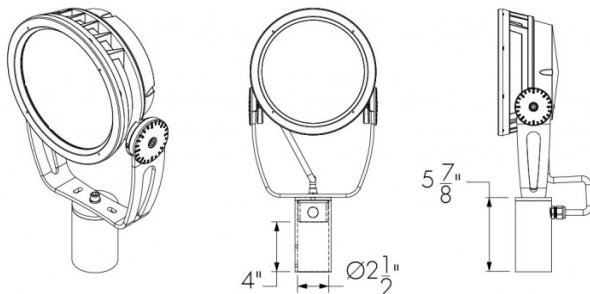

**TN2** - Tenon adapter to fit on 2 3/8 in O.D. tenon  
Vertical mounting only. Consult factory for horizontal mounting.

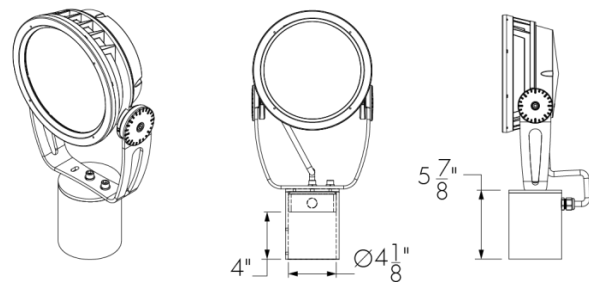


**TN4** - Tenon adapter to fit on 4 in O.D. tenon  
Vertical mounting only. Consult factory for horizontal mounting.

**Optical accessories (order separately)**

Installed optical accessories will affect the maximum pivot limits for each mounting option, consult factory for details.


**SN - Snoot**

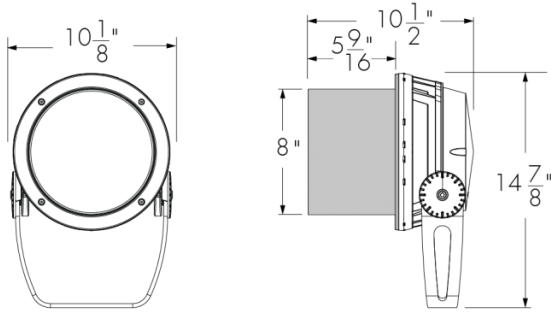

**LBLSN-FINISH-BK-OPTIONS (CRC)**

Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


**VS - Visor**

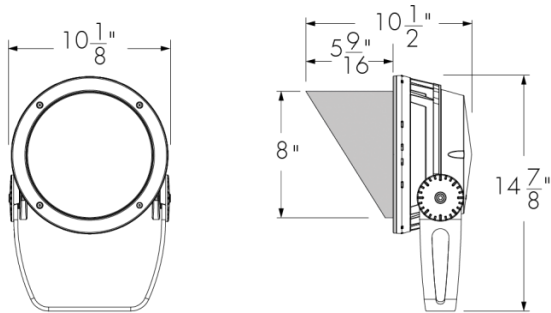

**LBLVS-FINISH-BK-OPTIONS (CRC)**

Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


**WG - Wire guard**

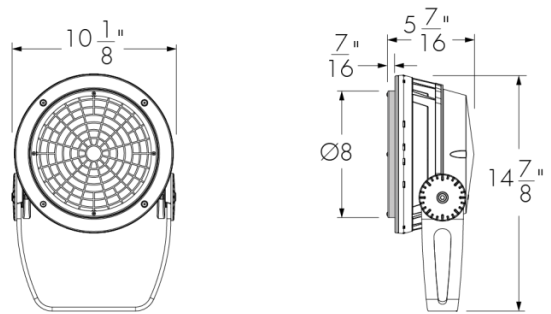

**LBLWG-FINISH-OPTIONS (CRC)**

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


**SNW - Snoot wide**

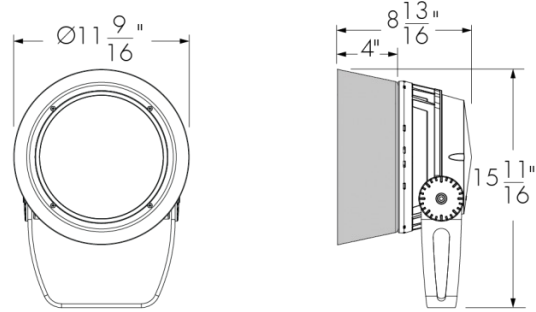

**LBLSNW-FINISH-BK-OPTIONS (CRC)**

Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

**LSLA - Linear spread lens adjustable**

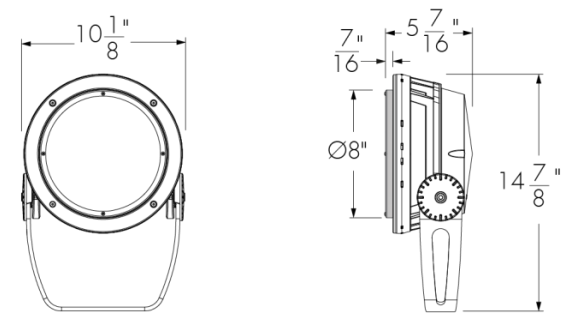

**LBLLSLA-FINISH-OPTIONS (CRC)**

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

**Accessory combinations**

+	Snoot	Snoot wide	Visor
<b>Linear spread lens adjustable</b>	LBLSNLSLA	N/A*	LBLVLSLA
<b>Wire guard</b>	LBLSNWG	N/A	LBLVSWG


Accessory combinations must be ordered together on a single line

Ex: A snoot + wire guard combination order code is LBLSNWG-**FINISH-BK-OPTIONS**. A maximum of two accessories can be combined per fixture.

\*Consult factory for a linear spread lens adjustable + snoot wide combination.


**Diffuser lenses (intended for mockup purposes only, order separately)**

Diffuser lens 1 (1 notch)




147677

Diffuser lens 2 (2 notches)




147678

Diffuser lens 3 (3 notches)




147679

Diffuser lens 4 (4 notches)




147680

Diffuser lens 5 (5 notches)



147681

Diffuser lens 6 (6 notches)



147682

**Final distribution using diffuser lenses**

Original Distribution on Fixture	Final Distribution Using Diffuser Lens					
	Diffuser Lens 1 1 Notch	Diffuser Lens 2 2 Notches	Diffuser Lens 3 3 Notches	Diffuser Lens 4 4 Notches	Diffuser Lens 5 5 Notches	Diffuser Lens 6 6 Notches
XN (4°/5°)	VN	NS				
VN (6°)	NS					
NS (10°)			NF	M	FL	WFL
NF (20°)						
M (30°)				FL		
FL (40°)					WFL	
WFL (60°)						

Choose a diffuser lens based on the desired final beam distribution. Refer to the 6-digit part numbers above to order diffuser lenses individually. To order a complete set of 6 diffuser lenses in a bag, refer to the following item names: **LBS**: LBALK-S **LBM/LBMP**: LBALK-M **LBL/LBLP**: LBALK-L **LBG/LBGP**: LBALK-G **LBX/LBXP**: LBALK-X.


The diffuser lenses are intended for mockup purposes only. A lens holder is required to install a diffuser lens on the fixture, order separately using the following names: **LBS**: LBSLSLA-FINISH-LBALK **LBM/LBMP**: LBMLSAL-FINISH-LBALK **LBL/LBLP**: LBLLSLA-FINISH-LBALK **LBG/LBGP**: LBGLSLA-FINISH-LBALK **LBX/LBXP**: LBXLSLA-FINISH-LBALK

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

Refer to the Diffuser Lens Installation Instructions on the Lumenpulse website for information on installing the diffuser lenses.


**Control boxes (order separately)**

**CBX-DMX/RDM - DMX/RDM enabled (daisy chain or star configuration)**

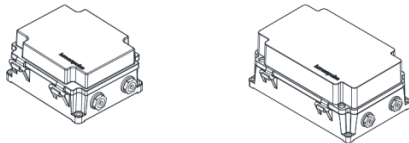

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for daisy chain configuration, 6x for star configuration), consult factory to order spares.

**CBX-ENET - Ethernet enabled (daisy chain or star configuration)**

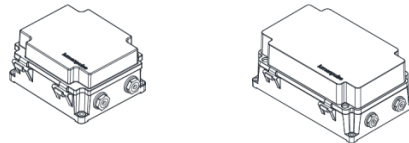

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.



## Control systems (order separately)

---

### LTN2 - Lumentone™ 2



Lumentone 2 is a simple pre-programmed DMX 512 controller with a push button rotary dial and live feedback.

### PHAROS - Pharos® kit



The Pharos kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations. 2 DMX universes kit shown.

## Diagnostic and addressing tools (order separately)

---

### LID - LumenID







LumenID is a diagnostic and addressing DMX/RDM tool. It must be specified on all DMX applications. Consult LID specification sheet for details.

### LID-LT - LumentalkID



LumentalkID is a diagnostic and addressing tool. It must be specified for all Lumentalk (LT) applications. Consult LID-LT specification sheet for details.

**EPA Guide**


	<b>LBL</b> 	<b>LBL with snoot</b> 	<b>LBL with visor</b> 	<b>LBL with snoot wide</b> 
<b>EPA front (sq ft)</b>	0.642	0.642	0.642	1.016
<b>EPA side (sq ft)</b>	0.214	0.473	0.473	0.452

**Typical wiring diagrams**

**Wiring color code**


UL Color Code	USE
Green	Ground
Black	Line
White	Line/Neutral
Red or Purple	0-10V / Data +
Orange	0-10V / Data -
Gray	Signal common (DMX/RDM only)

**Lumentalk (LT)**

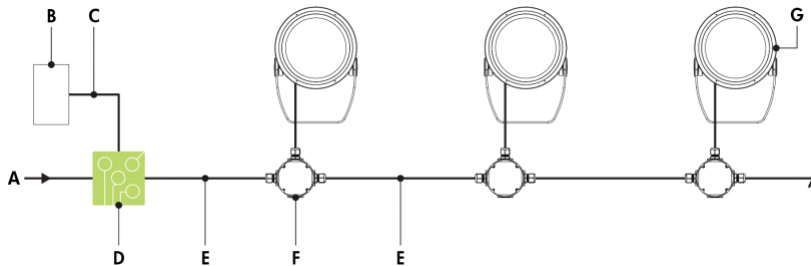

- A** - Power input (100-277V AC, wiring by others)
- B** - DMX/RDM controller (order separately from Lumenpulse, or by others)
- C** - Data wiring (by others)
- D** - Lumentranslator 2 (LTL2-DMX)
- E** - Power wiring (by others)
- F** - Junction box (by others)
- G** - Lumenbeam Large


**Lumentalk (LT) - wiring detail**



- A** - Power input (control over power line via Lumentalk system) or from previous fixture
- B** - To fixture
- C** - To next fixture
- D** - Line
- E** - Ground
- F** - Line/Neutral
- G** - Wire-nut (by others)
- H** - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk enabled fixtures must be commissioned using LumentalkID software and a LID-LT. Consult factory for details.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system.
- No third party fixtures allowed on the same circuit.
- 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for applications that require additional capabilities.
- 50 watts per fixture.

**Star Layout (DMX/RDM)**

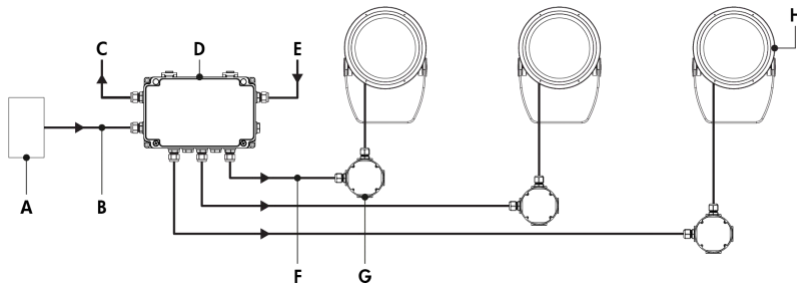

- A** - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B** - Data input (Belden 9841 or equivalent, by others)
- C** - Data output to next CBX (optional, not isolated/not boosted)
- D** - CBX-ST
- E** - Power input (100-277V AC, wiring by others)
- F** - Power and data output to fixture (wiring by others)
- G** - Junction box (by others)
- H** - Lumenbeam Large

**Star Layout (DMX/RDM) - wiring detail**



- A** - From CBX
- B** - Lumenterminator
- C** - To fixture
- D** - Data -
- E** - Data +
- F** - Neutral
- G** - Ground
- H** - Line
- I** - Signal common
- J** - Wire-nut (by others)
- K** - Junction box (by others)


**Maximum fixture count per run**

Configuration/Voltage	120V	208V	240V	277V
<b>LBL</b>	18	28	32	32

Based on 15A maximum, 16AWG cable, fixtures spaced 10 ft on center, first fixture 50 ft from CBX.


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST.
- RGB color mixture option requires 3 DMX addresses. RGBW30K and RGBW40K color mixture options require 4 DMX addresses. RGBA color mixture option requires 4 DMX addresses.
- DMX terminator is required at the end of each run to maintain data integrity. Six (6x) DMX lumenterminators included per CBX-ST. See installation instructions for details.
- 50 watts per fixture.

## Daisy Chain Layout (DMX/RDM)

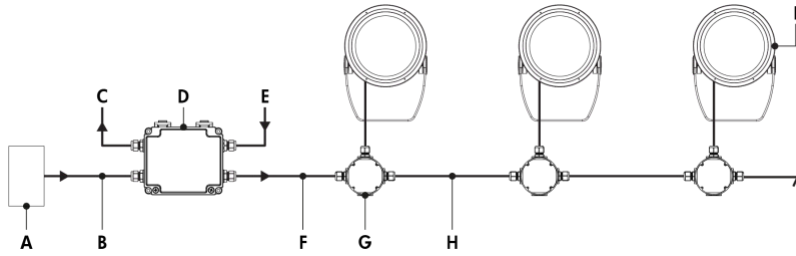


- A** - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B** - Data input (Belden 9841 or equivalent, by others)
- C** - Data output to next CBX (optional, not isolated/not boosted)
- D** - CBX-DS
- E** - Power input (100-277V AC, wiring by others)
- F** - Power and data output to fixture (wiring by others)
- G** - Junction box (by others)
- H** - Power and data wiring (by others)
- I** - Lumenbeam Large

## Daisy Chain Layout (DMX/RDM) - wiring detail (first or middle of run)



- A** - From CBX or previous fixture
- B** - To fixture
- C** - Neutral
- D** - Data +
- E** - Data -
- F** - To next fixture
- G** - Signal common
- H** - Line
- I** - Ground
- J** - Wire-nut (by others)
- K** - Junction box (by others)

## Daisy Chain Layout (DMX/RDM) - wiring detail (end of run)



- A** - From CBX or previous fixture
- B** - Lumenterminator
- C** - To fixture
- D** - Data -
- E** - Data +
- F** - Neutral
- G** - Ground
- H** - Line
- I** - Signal common
- J** - Wire-nut (by others)
- K** - Junction box (by others)


## Maximum fixture count per run

Configuration/Voltage	120V	208V	240V	277V
<b>LBL</b>	18	28	32	32

Based on 15A maximum, 16AWG cable, fixtures spaced 10 ft on center, first fixture 50 ft from CBX.


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 1 output per CBX-DS.
- Maximum of 3 ft cable length between fixture and next junction box for daisy chain layout.
- RGB color mixture option requires 3 DMX addresses. RGBW30K and RGBW40K color mixture options require 4 DMX addresses. RGBA color mixture option requires 4 DMX addresses.
- DMX terminator is required at the end of each run to maintain data integrity. Two (2x) DMX lumenterminators included per CBX-DS. See installation instructions for details.
- 50 watts per fixture.

**DALI-2 dimming Type 8 (DALIT8)**

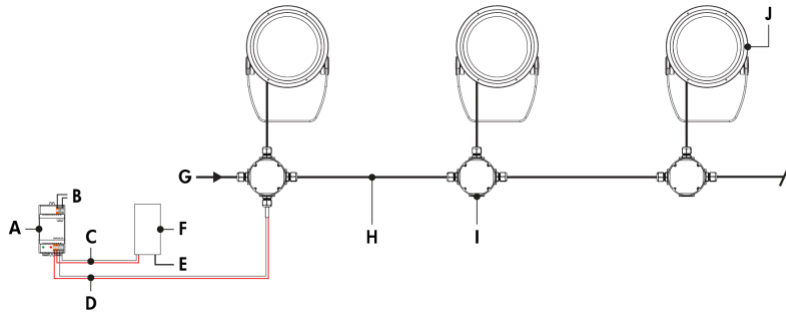

- A** - DALI bus power supply (by others)
- B** - Power input for DALI bus power supply (wiring by others)
- C** - Data output to DALI controller (wiring by others)
- D** - Data output to fixture (wiring by others)
- E** - Power input for DALI controller (if required, wiring by others)
- F** - DALI controller (by others)
- G** - Power input (100-277V AC, wiring by others)
- H** - Power and data wiring (by others)
- I** - Junction box (by others)
- J** - Lumenbeam Large

**DALI-2 dimming Type 8 (DALIT8) - wiring detail**



- A** - Power input or from previous fixture
- B** - To fixture
- C** - DA +
- D** - DA -
- E** - To next fixture
- F** - Line
- G** - Ground
- H** - Neutral
- I** - Wire-nut (by others)
- J** - From DALI controller (by others)
- K** - Junction box (by others)

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- The Lumenbeam responds to RGBWAF controls.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.
- 50 watts per fixture.

**How to order**

Housing	Voltage	Color and Color Temperature	Optics	Optical Option (4) (8)	Finish	Control	Options	Certification	Cable Length (15) (20)	Cable Color	Buy American Act
LBL Lumenbeam™ Large	<b>100</b> 100 volts	<b>RGB</b> RGB	<b>VN</b> Very Narrow 6° (5)	<b>LSLH</b> Linear spread lens horizontal distribution (7)	<b>BK</b> Black Sandtex®	<b>LT</b> Lumentalk (12) (13)	<b>SY</b> Short Yoke	<b>UL</b> UL compliant	<b>3FT</b> 3 ft (15) (20)	<b>BK</b> Black	<b>BAA</b> Buy American (21) (22)
	<b>120</b> 120 volts	<b>RGBW30K</b> RGB + white 3000K (1)	<b>NS</b> Narrow Spot 10° (5)	<b>LSLV</b> Linear spread lens vertical distribution (7)	<b>BRZ</b> Bronze Sandtex®	<b>DMX/RDM</b> DMX/RDM enabled (14) (15)	<b>3GV</b> 3G ANSI C136.31-2010 Vibration Rating for bridge applications	<b>CE</b> CE compliant (19)	<b>10FT</b> 10 ft	<b>WH</b> White (21)	
	<b>208</b> 208 volts	<b>RGBW40K</b> RGB + white 4000K (1)	<b>NF</b> Narrow Flood 20° (5)		<b>SI</b> Silver Sandtex®	<b>DALIT8</b> DALI-2 dimming Type 8 (16)		<b>CEII</b> CE compliant Class II double insulated (19)	<b>20FT</b> 20 ft		
	<b>220</b> 220 volts	<b>RGBA</b> RGB + amber	<b>M</b> Medium 30° (5)		<b>WH</b> Smooth white		<b>CRC</b> Corrosion-resistant coating for hostile environments (17) (18)		<b>30FT</b> 30 ft		
	<b>240</b> 240 volts	<b>MRGBW30K</b> Opticolor cluster with MRGBW (red, green, blue, white 3000K) (2) (3) (4)	<b>FL</b> Flood 40° (5)		<b>BKTX</b> Textured black				<b>50FT</b> 50 ft		
	<b>277</b> 277 volts	<b>MRGBW40K</b> Opticolor cluster with MRGBW (red, green, blue, white 4000K) (2) (3) (4)	<b>WFL</b> Wide Flood 60° (5)		<b>BRZTX</b> Textured bronze non-metallic				<b>70FT</b> 70 ft		
		<b>MRGBA</b> Opticolor cluster with MRGBA (red, green, blue, amber) (2) (3)	<b>NAS</b> Narrow Asymmetric (5)		<b>GRATX</b> Textured medium gray				<b>100FT</b> 100 ft		
			<b>WW</b> Asymmetric Wallwash (5)		<b>GRNTX</b> Textured green						
					<b>WHTX</b> Textured white						
					<b>CC</b> Custom color and finish (please specify RAL color) (9) (10) (11)						

**Notes:**

- 2700K, 3500K and Royal Blue available, consult factory. Longer lead times apply.
- Not available for VN, NAS and WW optics.
- Consult factory for the availability of more color and CCT options.
- MRGBW30K and MRGBW40K can be configured to MRGB via RDM, consult factory for more details.
- Factory installed, not interchangeable on site.
- Optical options are factory installed and cannot be changed in the field.
- Field adjustable spread lens optical accessory available, order separately.
- Not available with WFL, NAS and WW optics.
- Lumenpulse offers a wide selection of RAL CLASSIC (K7) colors with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colors, other RAL textures and glosses, or to match alternate color charts. Final color matching results may vary.
- Setup charges apply for RAL colors. Consult factory for details.
- Longer lead times can be expected for custom RAL color finishes.
- A Lumentranslator 2 (LTL2) and LumentalkID (LIDL2) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.
- Not available with Class II double insulated option.
- A control box (CBX) and LumenID (LID) must be specified.
- Maximum of 3 ft cable length for daisy chain DMX applications with CBX-DS.
- DALI-2 Type 8 controller required, provided by others.
- Use only when exposed to salt spray. This option is not required for normal outdoor exposure.
- Setup charges apply. Consult factory for details.
- Consult European specification sheets and installation instructions for CE and CE Class II wiring information.
- 3 ft cable length is standard unless otherwise specified.
- Not available with CE or CBI certification options.
- Contact your Lumenpulse Sales Representative for more information on order volume details.