


ETC130-GB LED ASC

611-3120

1/4

we-ef

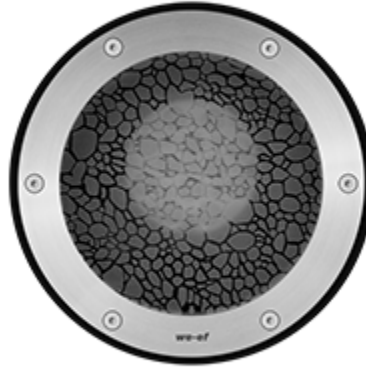

Description

IP67. Inground LED uplight. Suitable for flush installation in concrete or earth. Drive Over rated. Offset gimbal mounted lamp module, with lockable aiming, 30° vertical tilt, and 360° horizontal rotation. Special effects can be realized with linear lens, flood lens, or color filters. ASC Anti Slip Coating.

Beam Type	symmetric, medium beam [M]
------------------	----------------------------

Light Source	LED-12/18W / 500 mA - 3000 K
---------------------	------------------------------

CRI	80
------------	----

Gear Type	electronic gear
------------------	-----------------

Nominal Luminous Flux (lm)

LED Lumens	184.8 lm
------------	----------

LEDs	12
------	----

Total Lumens	2217 lm
--------------	---------

Tj	85 °C
----	-------

Delivered Lumens Flux (lm)

LED Lumens	137.5 lm
------------	----------

Total Lumens	1650.2 lm
--------------	-----------

Ta	25 °C
----	-------



Rated Input Power	21 W
--------------------------	------

ETC130-GB LED ASC


611-3120

2/4

we-ef

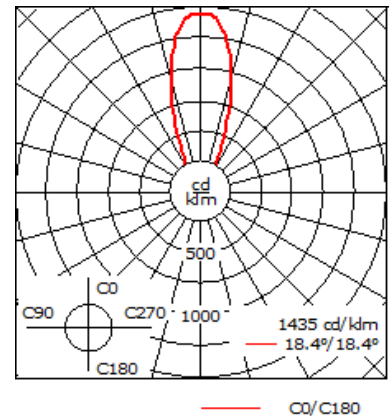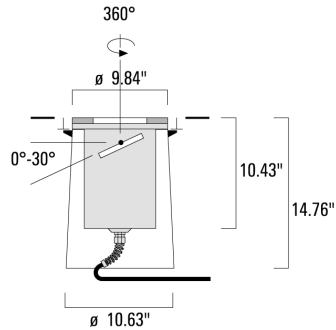

Material Specification

Body:	Luminaire body constructed of deep drawn stainless steel. Outer housing composite material.
Weight (lbs):	18.20
Lens:	5/8 in thick Antislip Coating ASC tempered glass lens (Slip Resistance Class R10), max load 5 Tonnes
Colours:	 Stainless Steel
Gasket:	Silicone rubber gasket
Fasteners:	PCS polymer coated stainless steel
Ingress protection:	IP67
Impact protection:	IK10+
Corrosion protection:	5CE
Mounting:	Suitable for installation in concrete or earth. Suitable for walk-over and DRIVE-OVER applications. Proper drainage and foundation support must be provided.
Listings:	ETL listed. Suitable for wet locations.

Electrical Specification

Power supply:	Integral [ECG] LED driver provides 120-277 volt range.
Termination:	Factory sealed termination chamber
Cable:	3 feet of flexible 18/3 cable

ETC130-GB LED ASC

611-3120

3/4

Lifetime

LED >60,000 h Ta 25°C (L70/B10) Control gear >50,000 h Ta 25°C

Dimming

0-10V available in request. Must be factory fitted.

we-ef

Optical Accessories

Flood lens

Broadens light distribution in all planes. Does not fit in combination with [W] lens.

C1

■ 611-8037 IO-360-ETC130-GB-LED

3.86



Linear spread lens

Broadens light distribution in one plane only. Does not fit in combination with [W] lens.

ETC130-GB LED ASC

611-3120


4/4



C1

611-8038 IO-180 ETC130/330-GB LED

3.94



Electrical Accessories

Sealable junction box

SJB sealable junction box, for inground mains connection. Provided with 3 UL4860 connectors

	C1	M1	M2
697-8072 Sealable junction box SJB 130	5.75	Ø 0.39	Ø 0.47 - 0.75

