




3GQ-4PLI-DI

3.5" LINEAR PENDANT
DIRECT/INDIRECT

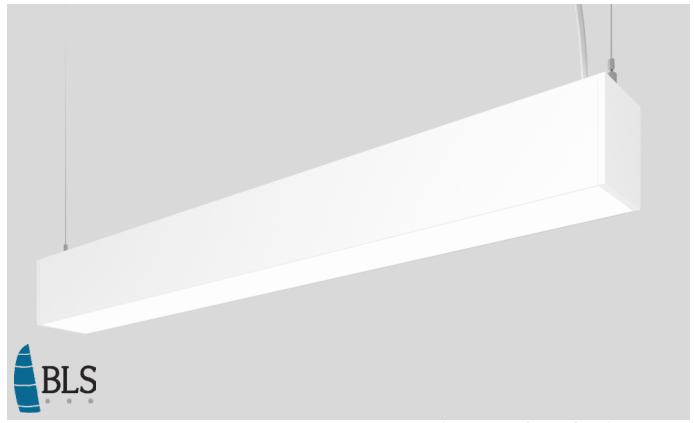

10 DAY QUICKSHIP
Max Order Size: 400'

3.5" aperture with one piece extruded aluminum housing
Individual or continuous runs available in multiple run configurations
Direct/Indirect distribution with multiple lumen output options
LED system with performance up to 144 lumens per watt
Extruded acrylic lens available in flush, 1" and 2" drop lens options
Widespread and asymmetric optics available
1% dimming standard with several driver options

ORDERING INFORMATION (Options highlighted available for QuickShip)

PROJECT:	<input type="text"/>	TYPE:	<input type="text"/>
CATALOG #:	<input type="text"/>	DATE:	<input type="text"/>

CAT. NO	LUMEN OUTPUT (DIRECT)	LUMEN OUTPUT (INDIRECT)	CRI	COLOR TEMP
3GQ-4PLI-DI	L250 - LOW OUTPUT (250 LM/FT) ¹	L250 - LOW OUTPUT (250 LM/FT) ¹	S80 - 83+ CRI (STANDARD)	27K - 2700K
	L500 - MEDIUM OUTPUT (500 LM/FT)	L500 - MEDIUM OUTPUT (500 LM/FT)		30K - 3000K
	L750 - HIGH OUTPUT (750 LM/FT)	L750 - HIGH OUTPUT (750 LM/FT)	H90 - 93+ CRI	35K - 3500K
	L1000 - VERY HIGH OUTPUT (1000 LM/FT) ²	L1000 - VERY HIGH OUTPUT (1000 LM/FT) ^{2,3}		40K - 4000K
	LC___ - CUSTOM OUTPUT (SPECIFY LM/FT)	LC___ - CUSTOM OUTPUT (SPECIFY LM/FT)		

VOLTAGE	DRIVER	LENS OPTION (DIRECT)	LENS OPTION (INDIRECT)	FINISH
UNV - 120-227V	DIM - 0-10V (STANDARD - 100-1%)	FL - FLUSH	FL - FLUSH	WH - WHITE (STANDARD)
347 - 347V (0-10V ONLY)	DHL2 - LUTRON HI-LUME LDE1 (100-1% ECOSYSTEM)	DD1 - 1" DROP LENS	WSO - WIDESPREAD OPTIC	SV - SILVER
	DALI - DALI (100-1%) ⁴	DD2 - 2" DROP LENS	ASY - ASYMMETRIC OPTIC	BK - BLACK (15 DAYS)
	DO1 - 0-10V (100-0.1%)	DASY - ASYMMETRIC OPTIC		All mounting canopies provided in white as standard

CABLE LENGTH	CIRCUITING	OPTIONS	LENGTH (FEET)
60 - 60"	1C - 1 CIRCUIT	EMB - INTEGRAL EMERGENCY BATTERY (MIN 4' SECTION)	S - ___' (STRAIGHT RUN) *
120 - 120"	2C - 2 CIRCUIT	EMC - EMERGENCY CIRCUIT	L - ___' X ___' (L-SHAPE)
			U - ___' X ___' X ___' (U-SHAPE)
			R - ___' X ___' (RECTANGLE/SQUARE)
			T - ___' X ___' (T-SHAPE)
			X - ___' X ___' (X-SHAPE)
			CUS - ___ (CUSTOM LAYOUT - PROVIDE DRAWING)
			* Individual units available in 2', 3', 4', 5', 6', and 8' Continuous runs available in 1' increments as standard

¹ L250 (250LM/FT) not available in 2' and 3' lengths (Please specify LC400 for 2' and 3' fixture length when outputs lower than 500LM/FT are required)
² L1000 (1000LM/FT) not available for H90 (93+ CRI)
³ L1000 (1000LM/FT) not available for ASY (Indirect Asymmetric optic)
⁴ DALI-2 (Type 6) provided as standard. Please consult factory for DALI (Type 8) options

JULY 30, 2020

