



PRODUCT DATA SHEET

Product Overview

Building-mounted light for entrances, stairwells, corridors and other pedestrian areas. Non-cutoff, Cutoff and Full Cutoff configurations. Incandescent, fluorescent, metal halide or high pressure sodium sources.


Construction

Rugged, corrosion-resistant, die-cast aluminum back housing and hinged door frame. Castings are sealed with a one-piece gasket to inhibit the entrance of contaminants.¹

Features

Housing configured for mounting directly over a standard 4" outlet box or for surface wiring via any of three convenient 3/4" threaded conduit entry hubs.² Anodized aluminum reflector. Medium base lamp included (except Incandescent).

BUILDING MOUNTED

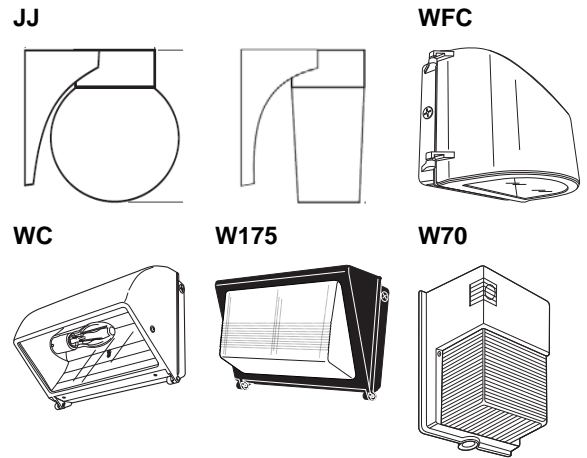

Listings

Listed and labeled to UL standards for wet locations. Listed and labeled to CSA standards. 25°C maximum ambient temperature.

Warranty

Fixtures are covered by Lithonia Lighting 12-month warranty against mechanical defects in manufacture.

Catalog #	Description	Dimensions (L x W x D; inches)	Fixture Weight (lbs.)	Pallet Quantity
Non-Cutoff				
JJ100I M6	100W incandescent, polycarbonate covers, bronze	11 x 6 x 7.87	2.7	168
JJ13L 120 M6	13W compact fluorescent, polycarbonate covers, bronze	11 x 6 x 7.87	2.7	168
JJ50SL 120 M6	50W high pressure sodium, polycarbonate covers, bronze	11 x 6 x 7.87	3.6	168
JJ100IW M6	100W incandescent, polycarbonate covers, white	11 x 6 x 7.87	2.7	168
JJ13LW 120 M6	13W compact fluorescent, polycarbonate covers, white	11 x 6 x 7.87	2.7	168
JJ50SLW 120 M6	50W high pressure sodium, polycarbonate covers, white	11 x 6 x 7.87	3.6	168
W70SPL 120	70W high pressure sodium, 120V, polycarbonate front cover	11 x 6.5 x 5.25	4.9	144
W175ML	175W metal halide, borosilicate glass lens	9 x 13 x 7.38	18.0	36
W250ML	250W metal halide, borosilicate glass lens	9.25 x 17.8 x 9.38	26.0	24
W400ML	400W metal halide, borosilicate glass lens	9.25 x 17.88 x 12.5	31.0	16
Cutoff, thermal and shock- resistant clear tempered glass lens				
WC175ML	175W metal halide	10.25 x 13 x 8.47	18.0	48
WC250ML	250W metal halide	10 x 17.13 x 14.5	21.0	16
WC400ML	400W metal halide	10 x 17.13 x 14.5	25.0	16
Full Cutoff, thermal and shock-resistant clear tempered glass lens				
WFC175ML	175W metal halide	9.38 x 14.38 x 8.75	14.5	36

¹ W70SPL 120 features polycarbonate front cover and cast-aluminum back plate, on which electrical components are mounted (utilizes 120V normal power factor ballast).

² W70SPL 120 has two 3/4" threaded conduit entry hubs. Utilizes 120V normal power factor ballast.



Lithonia Lighting
Outdoor Lighting
One Lithonia Way, Conyers, GA 30012
Phone: 770-922-9000 Fax: 770-918-1209
www.lithonia.com