

SAMPLE CATALOG NUMBER

CP5362 - 2FS54-1H39PAR20(MVOLT) - CMB - BA - GIA - BSIL - DCC - OAH(192)
 Model Number Lamping Option (Voltage) Ballast Option Trim Finish Bridge Accent Finish Mounting System Finish Option Option


Model Number		Lamping Options (per unit)			Ballast Options	Finish			Options	
Model	Dimensions (unit)	Bodylight	-	Optional Downlight		Trim	Bridge Accent	Mounting System		
CP5360 	W	16-1/4"	(413 mm)	LEDAMB	2FHP32	1PH35PB	CMB	PTD	PTD	DCC
	D	7-1/4"	(184 mm)	LEDBLU	2FS28	1PH39PAR20	MPB	BA		DIM-A
	OAH	192"	(4877 mm)	LEDGRN	2FS54		RMB	BCA		DIM-L
	X	52-1/2"	(1334 mm)	LEDRED			TMB	SNA		DIM10
				LEDWHT						FUSE
				◇ LEDRGB						HPT8L
										IEM
										OAH
										35PBL

Note: For best results use LEDWHT for "white color" light


CP5362 	W	16-1/4"	(413 mm)	LEDAMB	2FHP32	1PH35PB	CMB	PTD	PTD	PTD	DCC
	D	7-1/4"	(184 mm)	LEDBLU	2FS28	1PH39PAR20	MPB	BA	BA		DIM-A
	OAH	192"	(4877 mm)	LEDGRN	2FS54		RMB	BCA	BCA		DIM-L
	X	52-1/2"	(1334 mm)	LEDRED			TMB	SNA	GIA		DIM10
				LEDWHT				OKA	OKA		FUSE
				◇ LEDRGB				SNA	SNA		HPT8L
								WMA	WMA		IEM
											OAH
											35PBL

Note: For best results use LEDWHT for "white color" light

- Available in stem mount only
- Stem finish matches mounting system finish



Ballast compartment for CMB, MPB and TMB options (finish matches mounting system)

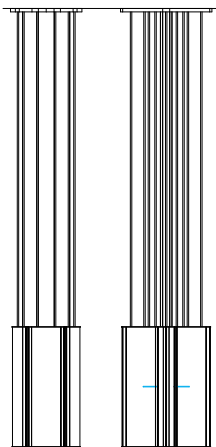

Door Height = 7'
 Ceiling Height = 30'
 Silhouette Height = 6'



ABBREVIATION KEY

Dimensions	
W	Foil Width
D	Foil Depth
OAH	Overall Height
X	Foil Height

Lamping Options (Voltage)

FHP32	32w High-Performance T-8, med bi-pin base, FLR (MVOLT; 347V)
FS28	28w T-5, mini bi-pin base, FLR (MVOLT; 347V)
FS54	54w T-5/HO, mini bi-pin base, FLR (MVOLT; 347V)
PH35PB	35w R111, GX8.5 base, MH (MVOLT)
PH39PAR20	39w PAR20, medium base, MH (120V; 277V)
LEDAMB	Amber, LED (MVOLT)
LEDBLU	Blue, LED (MVOLT)
LEDGRN	Green, LED (MVOLT)
LEDRED	Red, LED (MVOLT)
LEDWHT	White, 4000K, LED (MVOLT)
◇ LEDRGB	Red, Green, Blue (MVOLT)

◇ DMX compliant driver standard, remote mountable up to 20 feet from fixture body

Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Ballast Options (Required)

CMB	Canopy mounted ballast. Not available with dimming
MPB	Mid-point ballast. Not available with dimming
RMB	Remote ballast. Not available with dimming. 16' maximum distance from ballast to bottom of fixture
TMB	Top mounted ballast. Included with dimming

Mounting Options

Cable	Cable mount, power cord included
Stem	Stem mount

Finishes

PTD	Painted - specify color code (ex. BRNZ for Bronze)
BA	Brushed Aluminum
BCA	Brushed Chrome Alternative
GIA	Glacier Ice Acrylic
OKA	Orange Krush Acrylic
SNA	Satin Nickel Alternative
WMA	Winter Mist Acrylic

Options

DCC	Damp clear coat for metal finishes in damp locations. Required for 5 year warranty
DIM-A	Fluorescent dimming, Advance Mark 10, specify voltage. Not available with FS28 lamping. Top mounted ballast (TMB) is required and included. FHP32 lamping only
DIM-L	Fluorescent dimming, Lutron Eco-10, specify voltage. Top mounted ballast (TMB) is required and included
DIM10	Single color LED dimming, 0V-10V
FUSE	Fusing for fluorescent lamping
HPT8L	Include 32w High-Performance Osram Octron® XPS® Ecologic®3 3500K T-8 lamp providing up to 42,000 hour life (rated at 12 hours/start)
IEM	Integral emergency battery pack, specify voltage. Top mounted ballast (TMB) or mid-point ballast (MPB) is required. 14" maximum gap to ballast with MPB option. FS28 or FS54 lamping only. Not available with downlight
OAH	Overall height variation from standard. Include desired height in inches. (ex. OAH(192) will produce an overall fixture height of 192")
35PBL	Include Osram Powerball® R111 lamp (24° beam spread)

PHOTOMETRICS and BIM

Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com
 See page XXX for single unit reports



AIR FOIL™ MOBILE CLUSTER

Typical Applications

- 2-story corridor
- Atrium
- Church
- Civic
- Airport
- Healthcare
- Education
- Large venue
- Hospitality

Features

- 5 year product warranty
- Single feed wireway mounting system
- Edge lit trim
- Matte white acrylic diffuser
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Bridge accent is formed from 1/4" colored acrylic or 1/8" finished aluminum
- Consistent brightness uniformity gradient minimizes shadowing and lamp image
- T-5 fluorescent or high performance T-8 fluorescent lamping
- Low energy, long life LED lamping
- Osram Octron® XPS® Ecologic®3 T-8 lamp/ballast combination (HPT8L option) provides up to 42,000 hours of lamp life (rated at 12 hours/start)
- Optional recessed downlight with PAR lamps for beam spread selection
- Osram Powerball® R111 downlight lamping option
- Integral ballast for HID downlight lamping
- Remote ballast required for fluorescent bodylight lamping (see ballast options). OAH greater than 16' requires canopy, mid-point or top mounted ballast. Dimming requires and includes top mounted ballast



Approved for indoor damp locations

LED Features

- Static color LED bodylight or color changing LEDRGB
- Modular design allowing replacement of the LED linear source and driver
- Constant current LED technology to protect LEDs from experiencing "over current" conditions that can cause overheating and premature failure
- Thermally managed within manufacturer specifications to promote long LED life
- No ultraviolet or infrared, alleviating potential damage to art, fabric and materials
- Mercury free LED source reduces impact to waste stream

Solid Color LED Features

- Available in amber, blue, green, white and red
- Optional 0V-10V LED dimming
- Remote driver mountable up to 20' maximum

Color Changing LED (RGB) Features

- DMX controller is available, see www.visalighting.com for details
- Remote DMX compliant driver with terminal block wiring and connections (20' maximum distance)
- DMX driver is field addressable through use of onboard switches

Suggested Variations

- Alternative cluster arrangement
- Decrease individual unit height
- See www.visalighting.com for additional variation suggestions



CP5360-BA-WMA-BSIL

Edge Lit Trim



Companions

