



FEATURES & SPECIFICATIONS

INTENDED USE — RT5S is designed for applications that require the extremely energy efficient delivery of comfortable volumetric light from a lay-in fixture that is appealing and shallow in depth and where room-side ballast access is required. Ideal for hospitals, offices, schools and numerous other commercial applications. **Certain airborne contaminants can diminish integrity of acrylic.** [Click here for Acrylic Environmental Compatibility table for suitable uses.](#)

OPTICAL SYSTEM — Delivers volumetric lighting by filling the entire volume of space with light, providing the ideal amount to walls, cubicles, work surfaces and people.

Luminous characteristics are carefully managed at high angles, distributing just enough intensity to deliver the volumetric effect.

98% reflective Alanod MIRO® silver optical assembly efficiently redirects lamp output to the refractor.

Regressed, one-piece refractive system obscures and softens the lamp and smoothly washes the reflector with light.

Linear faceted reflector softens and distributes light into the space and minimizes the luminance ratio between the fixture and the ceiling.

Mechanical cut-off across the reflector and fresnel refraction along the refractor provide high angle shielding and a quiet ceiling.

Sloped endplates provide a balanced fixture to ceiling ratio while enhancing the perception of fixture depth.

CONSTRUCTION — Rugged, steel reflector with embossed facets. Painted after fabrication. Door frame hinges down from either side.

Fixtures may be mounted end-to-end.


ELECTRICAL SYSTEM — Highly efficient program-start electronic ballasts, Class P, thermally protected, resetting, HPF, non-PCB, UL Listed, CSA Certified, sound rated A. Your choice of Premium or Premier XP T5 lamp with enhanced phosphors and 85 CRI. Ballast/lamp efficacy up to 100+ LPW. Lamp is TCLP compliant.

0.90 or 0.95 ballast factor standard for typical applications. 1.15 ballast factor or F54T5HO lamping available for higher ceiling height applications.

Bi-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

S5 option available for use with SIMPLY5™ Lighting Intelligence system with multi-level dimming. See SYNERGY® Lighting Controls specification sheets

| | |
|----------------|------|
| Catalog Number | |
| Notes | Type |

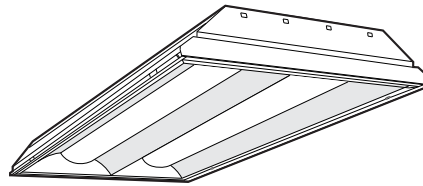

2RT5S

SIMPLY5
LIGHTING INTELLIGENCE

2'x 4'
2 Lamps
Premier, Premier XP T5 & T5HO

Specifications

Length: 48 (1218)

Width: 24 (610)

Depth: 3-3/16 (81)



All dimensions are inches (millimeters).

for more information. Ballast Disconnect provided standard where required to comply with U.S. and Canadian electrical codes.

MAINTENANCE — Lamps accessed by unlatching trim and allowing it to hinge open for easy maintenance. Ballast is accessed from below by removing channel cover.

LISTING — UL Listed to U.S. and Canadian standards.

WARRANTY — Fixture guaranteed for one year against mechanical defects in manufacture.

Protected by one or more of US Patents Nos. 7,229,192; D541,467; D541,468; D544,633; D544,634; D544,992; D544,933 and additional patent pending.

NOTE: Specifications subject to change without notice.

ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

Example: 2RT5S 28T5 MVOLT GEB95 LPM835P

| Series | Lamp type | Voltage | Ballast | Lamp | Options |
|--------------|----------------------------------------------------------------|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2RT5S | 28T5 28W T5 (46") 54T5HO 54W T5HO (46") ¹ | MVOLT² 347 ³ | GEB95 0.95 ballast factor GEB95S 0.95 ballast factor, step dimming GEB115 1.15 ballast factor GEB115S 1.15 ballast factor, step dimming GEB10PS 1.0 ballast factor, program start ¹ S5 SIMPLY5 ballast system ⁴ GEB90 .90 ballast factor GEB90S .90 ballast factor, step dimming | LPM835P Premier 3500°K 28W lamp LPM830P Premier 3000°K 28W lamp LPM841P Premier 4100°K 28W lamp L835XP Premier XP 3500°K 28W lamp L830XP Premier XP 3000°K 28W lamp L841XP Premier 4100°K 28W lamp LP835 3500°K 54W lamp LP830 3000°K 54W lamp LP841 4100°K 54W lamp | GLR Internal fast-blow fuse ⁵ PWS1836 6' prewire, 3/8" diameter, 18-gauge, 3-wire (n/a with step-level dimming) ⁶ PWS1846 6' prewire, 3/8" diameter, 18-gauge, 4-wire ⁷ EL14 Emergency battery pack; see Life Safety Section HW Hardwire for S5 system; replaces RELOC® |
| | Trim type (blank) Grid F Flanged | | | | |



NOTES:

- For T5HO applications, use GEB10PS or S5 ballast.
- MVOLT (120-277 volts), 50-60HZ.
- For 347V, use GEB95S or GEB10PS.
- SIMPLY5 includes 13' S5 SSC RELOC® wiring system, specify voltage unless HW (hardwire) or PWS is ordered.
- Must specify voltage, 120 or 277.
- For use with standard ballast.
- For use with step dimming ballast.

2RT5S Volumetric Recessed Lighting 2 x 4

MOUNTING DATA

Continuous row mounting of flanged units requires CRE and CRM trim options (see Options).



NOTES:

- 1 Recommended rough-in dimensions for F-trim fixtures 24"x48" (Tolerance is +1/4"-0").
Swing-gate range 1-3/16" to 3-15/16". Swing-gate span 23-3/8" to 26-11/16". Fixture swing-gate points require additional 1-1/16" over nominal fixture height.


| Ballast | Input Wattage 120/277 |
|--------------------------|--------------------------|
| GEB90, GEB90S | 55/54 |
| GEB90S @ 50% power mode | 27 |
| GEB95, GEB95S | 60/58 |
| GEB95S @ 50% power mode | 28/28 |
| GEB115, GEB115S | 73/71 |
| GEB115S @ 50% power mode | 35/35 |
| GEB80S @ 50% power mode | 52/51 |
| S5 - 28T5 0.95 | 60/58 |
| S5 - 28T5 1.15 | 76/76 |

T5/T8 Energy Comparison

| System | Lamp Type | Ballast Factor | Input Watts | Watts Saved Compared to T8 |
|---------------------|-----------|----------------|-------------|----------------------------|
| 3-lamp T8 Parabolic | F32T8 | 0.88 | 88 | — |
| 2RT5B 2-lamp T5 | F28T5XP | 0.90 | 54 | 34 |
| 2RT5B 2-lamp T5 | F28T5 | 0.95 | 58 | 30 |
| 2RT5B 2-lamp T5 | F28T5 | 1.15 | 71 | 17 |

PHOTOMETRICS

2RT5S 28T5, (2) FP28/835/PM/ECO lamps, 2730 lumens per lamp, s/m 1.2 (along) 1.4 (across), test no. LTL18423

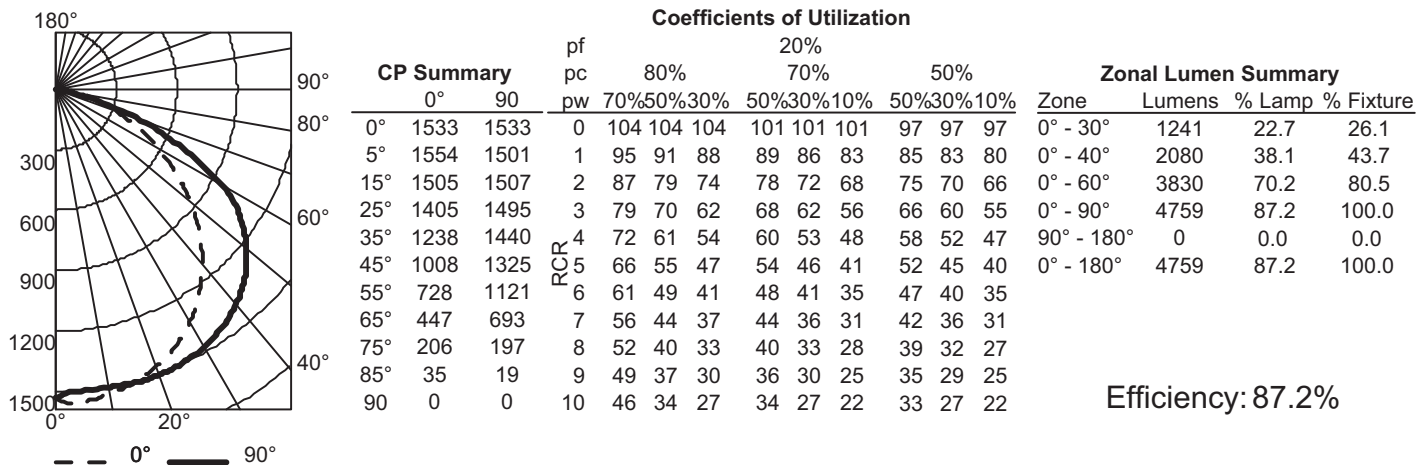

*The LER (Luminaire Efficacy Rating) is the lumens per watt rating for this fixture. It is used to compare the energy efficiency of various products. This photometric report is based upon IES testing procedures, as stated in LM-41-1998.



Lithonia Lighting
Fluorescent
One Lithonia Way, Conyers, GA 30012
Phone: 800-858-7763 Fax: 770-929-8789
www.lithonia.com