




INFINIUM™ LED 6" SERIES LED DOWNLIGHT 18 WATT MAX



FEATURES & SPECIFICATIONS:

- Powerful LED assembly in efficient parabolic trim with excellent cutoff.
- **All LED modules and drivers are replacable and up-gradeable.**
- 50,000 hours rated LED life.
- Trim supports a variety of lens /accessory options.
- Intended for Non-IC new construction.
- Frame constructed of 20 ga. aluminum.
- Supplied with 27" long, heavy ga. galvanized steel bar hangers.
- Electronic driver 120 Volt standard.
- UL Listed for Damp Locations.
- For options detail, see page numbers listed below.

Max Ceiling Thickness: 1.5 (38.1 mm)
 Ceiling Cutout: 6.6Ø (167.6 mm Ø)
 Fixture Weight: 5.0 lbs

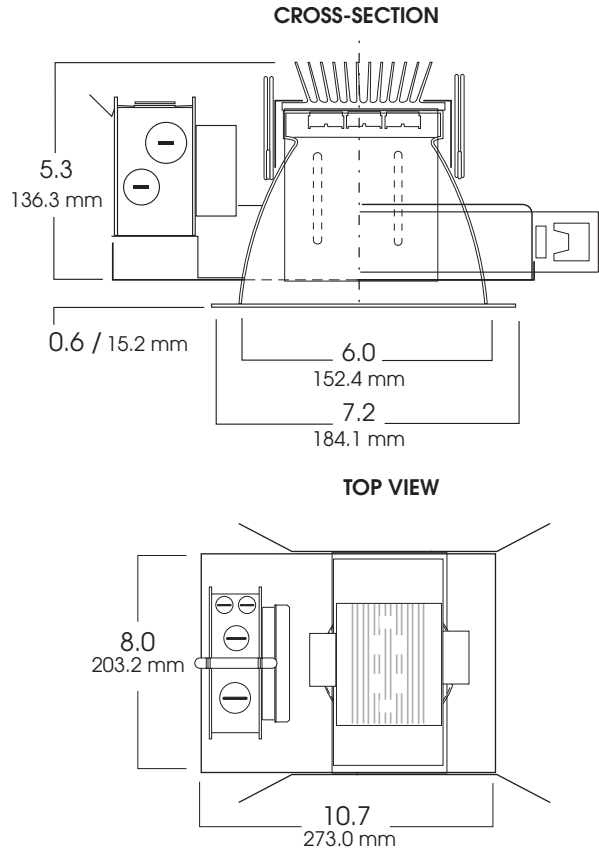

SERIES	LED	LUMENS	TEMPERATURE	VOLTAGE	OPTIONS	TRIM / FINISH	TRIM OPTIONS
SGE6LED- Spectrum Gold 6" LED Downlight	9w	350	3K -3000 Kelvin (2720-3040K)	E1 -120 Volt E2 -277 Volt	BH6 -Expandable Bar Hangers, 6" - 12" BH12 -Expandable Bar Hangers, 12" - 24" CB24 -C-Channel bars 1-470 FS -Fusing CCEA -Chicago Ceiling Plenum CCEA 1-480 CR -Corrosion Resistant 1-460 PR -Plaster Ring 1-430 SCA -Slope Ceiling Adaptor TBC -T-bar clips 1-475 EMLED -Emergency Back-up Battery DIMLED -LED Dimming Module	AR6455-MW -Matte White (standard) SG -Semi-Diffuse Low Iridescent CL -Clear Bright Alzak GO -Gold Alzak HZ -Matte Low Iridescent PW -Pewter Alzak UM -Umber Alzak WE -Wheat Alzak BL -Black Finish PF -Polished Flange BB -Black Micro Baffle WB -White Micro Baffle	FM -Diffuse Microlens GS -Gasket SO -Micro Prism Industrex™ lens DEC -Decorative Trims Available-see Trim Pages
	12w	650					
	15w	925					
	18w	1530					
SGE6LED	12W		3K	E1	EMLED	AR6455 SG	GS

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

