



Catalog Number	
Notes	Type

## FEATURES & SPECIFICATIONS

### CONSTRUCTION

Suitable for operating loads up to 42W.  
 23.0V to 26.5V DC output.  
 0-10V dimming standard.  
 Starting temperatures is 0°C.  
 Input voltage: 120-277V, 50Hz or 60Hz.  
 50,000-hour design life.  
 Class 2 output UL recognized to UL and CSA requirements.

### ELECTRICAL

No PCBs.  
 Suitable for dry and damp locations.  
 Class P, Type 1 outdoor acceptable.  
 High frequency — operates LED at 250kHz DC.  
 High power factor: 0.9 minimum.  
 Total harmonic distortion (THD) less than 20%.  
 Sound-rated A.  
 Short circuit and overload protection.  
 Inherent thermal protection.  
 Complies with ANSI C62.41 Category A for transient protection.  
 Complies with ANSI C82.11.  
 Complies with FCC part 15 non-consumer equipment EMC.

### LISTING


Driver shall be Underwriters Laboratory listed, Class P, Type 1, outdoor and CSA certified.

### WARRANTY

Driver shall carry a five-year warranty.  
*Specifications subject to change without notice.*

Electronic Driver

# ACCUDRIVE MVOLT

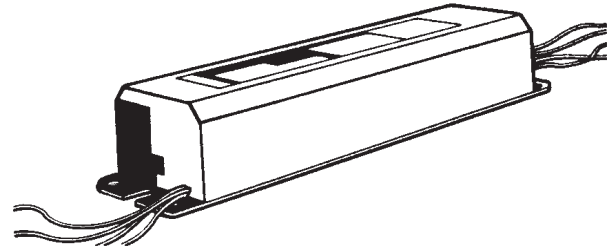

## PERFORMANCE MATRIX

Model Number	Power factor	Input Wattage	Input Current 120V	Input Current 277V	THD
DVR 45 MVOLT XA	0.90	45	0.379A	0.166A	<20%

