

se'lux®



Survivor® 9

Transport and harsh environment lighting solutions



Light. Ideas. Systems.


Waterproof, impact and vandal-resistant solutions for the most demanding applications



Next generation fixture completely re-engineered and re-designed for 2010



Survivor[®] 9 | Technical

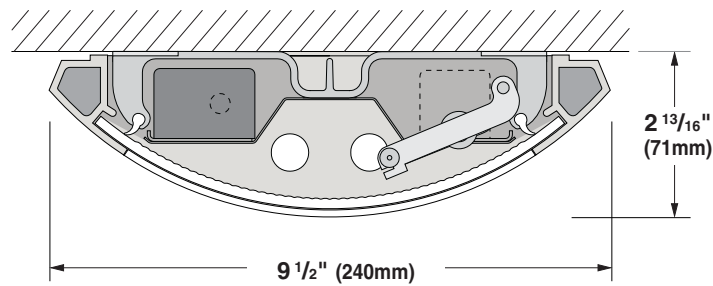

SUR9-2T5 Surface Mount

Ordering Matrix

For details and specifications, see our website at www.selux.com/usa

Series | **SUR9** Survivor[®] 9

Lamping | **1T5** | **2T5** | **1T5HO** | **2T5HO** | **1T8** | **2T8**

Shielding | **GL** Safety Glass, Opal (IP67 certified) | **PC** Polycarbonate Prismatic Satine Lens (IP66 certified)

Mounting | **F** Surface Mount | **V** Vertical Wall Mount¹ | **RS** Suspended Stem

Length | **002** Two Feet | **003** Three Feet | **004** Four Feet

Finish | **WH** White | **BK** Black | **SV** Silver | **SP** Specify RAL#

Voltage | **120** | **277** | **347**

Options | **MT** Media Trunking² | **EM** Emergency Ballast³ | **FS** Single Fusing | **CW** Cold Weather Ballast⁴ | **DM** Dimming

¹ Hinges replaced with (2) safety cables.

² Please consult factory.

³ Not available with T5HO.

⁴ T8 & T5HO only.

Versatile, unobtrusive fixtures for a wide range of interior and exterior applications



Survivor® 9 | Solutions

Mounting and wiring options designed to simplify installation and maintenance.

Precision reflector and prismatic lens systems for optimized output of T5, T5HO, and T8 fluorescent sources.

Integral concealed mounting brackets are outside the housing for easy installation and to ensure IP66/67 rating.

Compact architectural scale for a range of surface applications, complies with Americans with Disabilities Act (ADA).

Great for a range of applications including subways, tunnels, university campuses, and other pedestrian high traffic areas.



Choice of Shielding

Available with multi-layer Safety glass with an opal layer, or a polycarbonate prismatic satine lens. *Safety glass shown.*



Hinged Lens Door

Horizontal mount comes with built-in hinges to allow for easy maintenance. Vertical Wall Mount comes with safety cable standard.



Fully Gasketed

Door Frame is fully gasketed (min. IP66) with one-piece durable molded silicone to protect against dust, moisture, and insect penetration.



Choice of Lamping


Available in choice of 1 or 2 T5, T8, or T5HO lamping and cold-weather ballast options for a wide range of applications. *(2)T5 sockets shown.*



Tamper-resistant screws

Vandal resistant stainless steel screws are captive and tightly secure lens door to housing.

Tool-less access to lamp and ballast allows for easy installation and maintenance

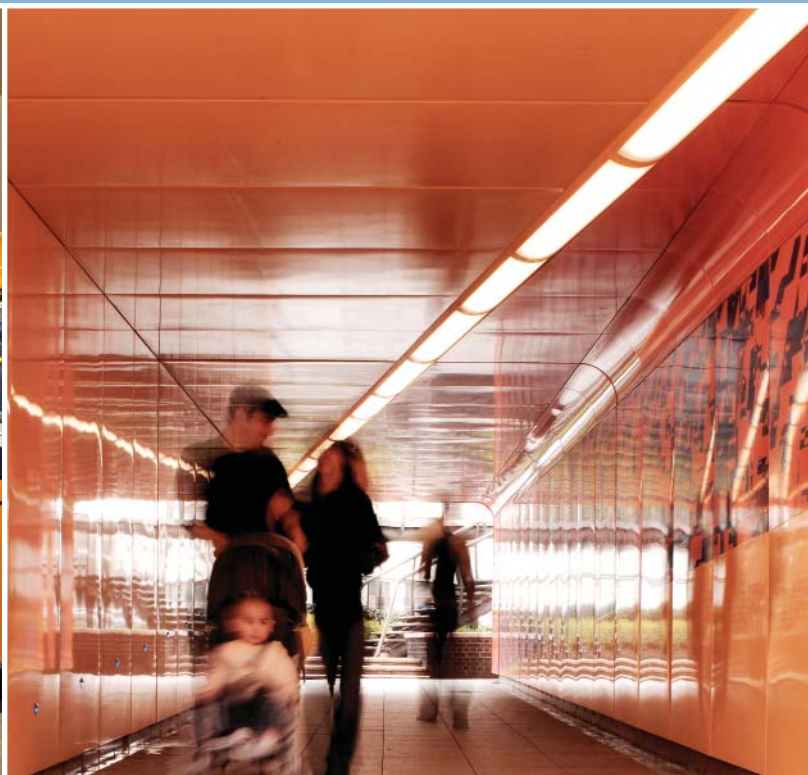

Survivor® 9 | Transport

Constructed of all high-quality materials, including marine-grade aluminum extrusion and die cast end-caps.

Durable, fully sealed and gasketed housing protects against moisture, dust, and insect penetration.

Choice of Opal safety glass (IP67 rated) or Polycarbonate Prismatic Satine Lens (IP66 rated).

Available in 2', 3', and 4' lengths with available multiple vertical and horizontal configurations.

Hinged lens door provides easy access to lamp, ballast, and maintenance.



Easy access to **Mounting Brackets and Terminal Block** makes installation and wiring connections fast.



Reflector/Ballast Tray with quick-disconnect snaps into the housing with spring latches, simplifying installation.



Lens Door is removable and easily attached to the hinges without tools and then secured to the housing with captive, tamper-resistant stainless steel screws.

se'lux

Light. Ideas. Systems.



SELUX Corporation
5 Lumen Lane
P.O. Box 1060
Highland, NY 12528

tel. (800) 735-8927
fax (845) 691-6749

seluxus@selux.com
www.selux.com/usa



BERLIN

LISBON

LONDON

LYON

MILAN

NEW YORK

STOCKHOLM

SYDNEY