

Specifications

Construction:

The luminaire is 18 5/8" x 32" tall and consists of a cast aluminum base and finial; die-cast arms, ballast lid and reflector housing; and spun aluminum roof. The roof has an internal hinge, hidden from view. Roof and ballast lid are sealed with gaskets. The lens is tempered clear flat glass with continuous seal. All exposed hardware is weather resistant.

Installation:

The luminaire mounts on a 3" O.D. x 3" tall tenon with six 1/4" socket set screws. The hinged roof / reflector housing is furnished with captive screws for access to the lamp and reflector. The reflector is removable without tools, rotatable and furnished with a quick-disconnect. The ballast assembly is furnished with a quick-disconnect plug and mounts on tool less lift-out bracket. The lift-out bracket is accessible by removing the ballast lid.

Optics:


The luminaire uses an internal anodized and segmented reflector with socket for horizontal lamp. Reflectors are available in Type II through V distribution and are interchangeable and rotatable. Luminaire is furnished with an H.I.D. ballast assembly. The luminaire is UL and CUL listed and labeled suitable for wet locations with an IP65 rating. Sockets are glazed porcelain, medium or mogul base, with copper alloy nickel-plated screw shell and center contact. Ballasts are core and coil, high power factor, regulating type. Lamp is available in up to 400 watts.

Finish:

The luminaire has a powder coat finish using premium TGIC polyester powder. The finish is a three-stage process which consists of drying, powder application and curing. Before coating, the parts go through a five-stage pretreatment process consisting of a heated alkaline cleaner, rise, phosphate coating, rinse and sealant.

Verona Luminaire: VR32

- Full cutoff optics
- Field rotatable optics
- IP65 rating

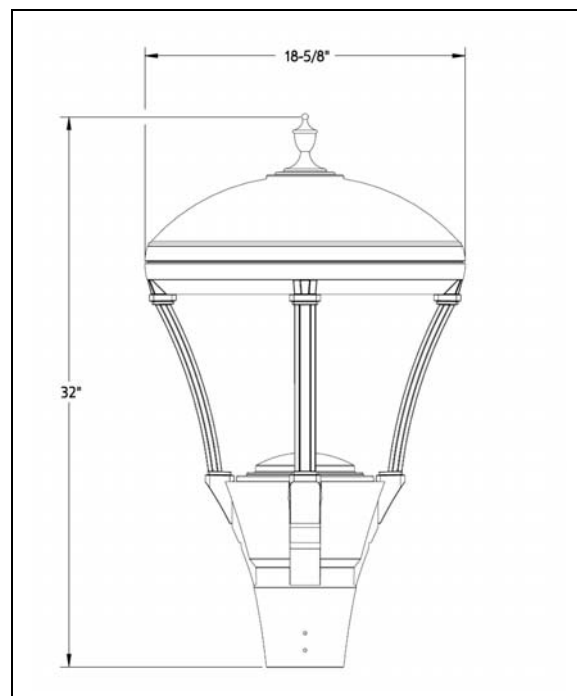

Luminaire	Description	Series #	Wattatge/Lamp	Lens	Distribution	Voltage	Options	Finish
2011-B W. Rundberg Lane, Austin, TX 78758 ph. (800)410-8899 fax (512)977-9622 www.antiquestreetlamps.com Acuity Brands Lighting Inc.	Cast aluminum, 18 5/8" dia. x 32" tall. Can be used with Verona arms and posts. Has 3" x 3" slip-fitter.	VR32	50M MED 250M MOG	GCF (flat glass)	SR2* SR3* SR4SC SR5S	TB1 TB2 TB3 TB4 347	HS* SF DF	ANBK
			70M MED 400M MOG					ANDB
			100M MED 250S MOG					ANDG
			150M MED 200S MOG					ANPP
			175M MED					CM
			50S MED					CS
			70S MED					
			100S MED					
			150S MED					