



Witt 5

Chandeliers



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com

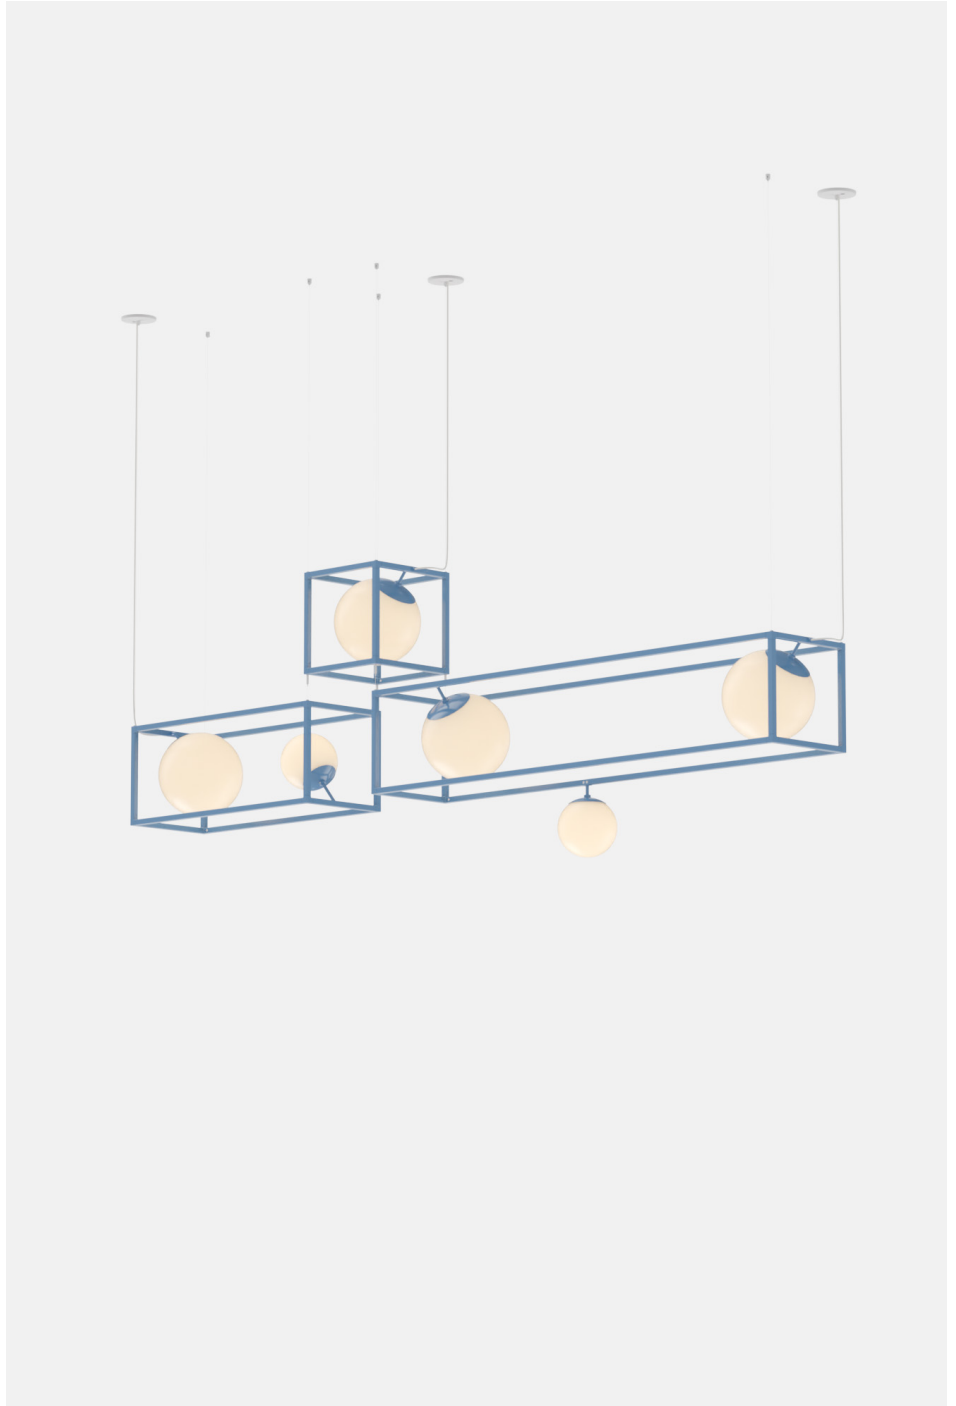

For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

Generate Date: Thu Jan 06 2022

DESCRIPTION

Witt is a contemporary, geometric take on the traditional chandelier. Two glowing, pearl-like luminaires are framed by the graphic outlines of five hollow brass cubes, which, like building blocks, allow for endless compositions: They can be hung in a linear procession, both horizontally and vertical

MATERIALS

Steel frame with satin opal globes

COLLECTION NOTES

Input 0-10V, 1% Dimming (_10_DEX) has Power Consumption and Luminaire Watts of 37W

PERFORMANCE

Estimate 3000 lm

Power Consumption 51W

Luminaire Watts 51W

90 CRI

LED LIFESPAN

50k hours

PATENT FILE NUMBER

Patent Number D872,341, D837,435, D891,673

CERTIFICATION

UL Listed

Suitable for Damp Locations

**SUSPENSION**

White 5" round flat canopy (Matte Black Witt gets black canopy)

Standard 150" white cord (Matte Black Witt gets black cord). Standard Hang Height 66". Minimum Hang Height 6"

Cable extension available (up to 150"). Field trimmable

PRODUCT DIMENSIONS

122 x 18 x 42 in H

PRODUCT WEIGHT

57 lbs / 26 kg

DIMENSIONAL WEIGHT

180 lbs

YOUR PRODUCT CODE

RGW-5- - - - -

Specification Logic

PRIMARY FINISH

Matte White Fine Texture	PC20
Quartzite	PC21
Glacier	PC22
White Hybrid	PC23
Cream White	PC24
Silk Grey	PC25
Ochre Yellow	PC26
Emerald	PC28
Matte Black	PC30
Breccia	PC31
Glimmer	PC32
Blue Hammertone	PC33
Graphite	PC34
Blue Gloss	PC36
Army Green	PC37
Brown Gold	PC40
Putty	PC41
Vermillion	PC42
Vert Clair	PC43
Buff	PC44
Dark Blue	PC46
Dark Red	PC48
Chalk Pink	PC60
Custom Powder Coat	PCXX
Mottled Brass	PF11
Satin Nickel	PF12
Polished Chrome	PF13
Polished Copper	PF14
Warm Bronze	PF15
Polished Black Nickel	PF16
Satin Brass	PF17
Custom Plated Finish	PFXX


COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

INPUT / CONTROL / POWER

110-120V Input TRIAC / ELV / 0-10V, 1% Dimming	120_TM_DEX
220-240V Input 0-10V, 1% Dimming	220_10_DEX
110-277V Input 0-10V, 0.1% Dimming	277_10_DEX
110-277V Input DALI, 0.1% Dimming	277_DL_DEX

Drawings

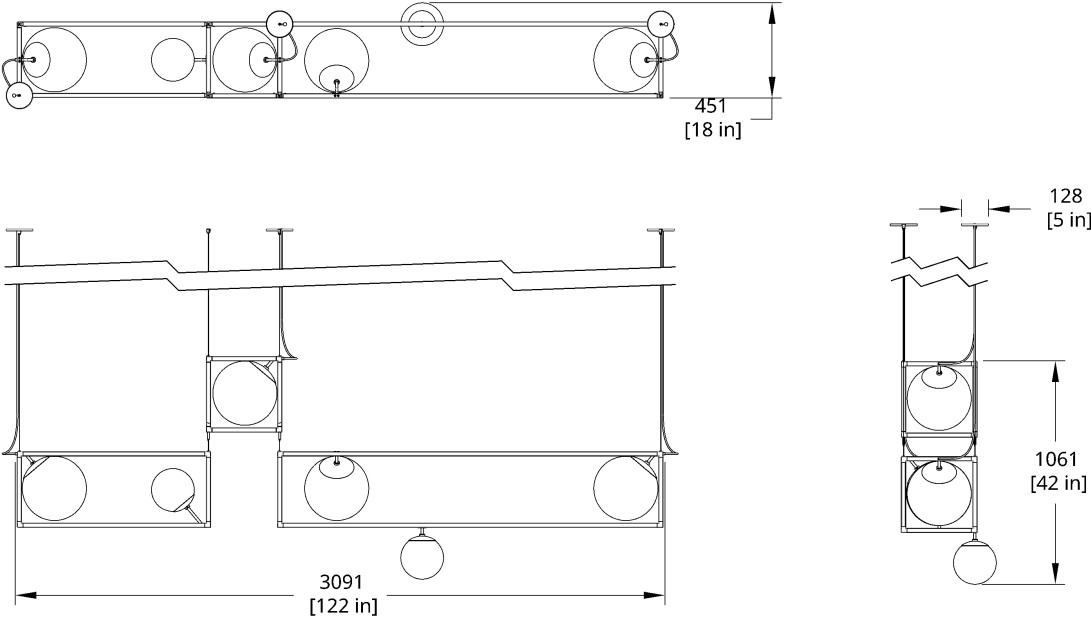

RGW-5 Witt Chandelier Dimension