


Cinema Triple Tiers



Chandeliers

50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

DESCRIPTION

The Cinema Chandelier makes a bold statement with minimal effort, featuring a simple circular frame in a rich metal or powder coated finish embellished by the warm glow of opal glass fixtures. Evocative of Old Hollywood's charm, Cinema's theatrical features are customizable to various compositions.

MATERIALS

Steel frame with satin opal globes

COLLECTION NOTES

Please contact a Sales rep to learn more for multi-tier configurations not available for online preview.

PERFORMANCE

18 Globes 4650 lm | 36 Globes 9300 lm

Power Consumption for 18 Globes 162W | 36 Globes 324W

90 CRI

LED LIFESPAN

50k hours

PATENT FILE NUMBER

Patent Number D825,090, D876,701, D851,806, D901,063

CERTIFICATION

UL Listed

Suitable for Damp Locations

**SUSPENSION**

White 5" round flat canopy x 3 (Contact your sales rep for more info)

Standard 72" cable and white power cord. Standard Hang Height 66". Minimum Hang Height 6".

Cord/cable extension available (up to 150"). Field trimmable

PRODUCT DIMENSIONS

96ØD x 42 in

DIMENSIONAL WEIGHT

783 lbs

YOUR PRODUCT CODE

C468- - - - - - -

Specification Logic

GLOBE

18 Globes (6 per Tier)

666

36 Globes (12 per Tier)

121212

PRIMARY FINISH

Matte White Fine Texture	PC20
Quartzite	PC21
Glacier	PC22
White Hybrid	PC23
Cream White	PC24
Silk Grey	PC25
Ochre Yellow	PC26
Emerald	PC28
Matte Black Fine Texture	PC30
Breccia	PC31
Glimmer	PC32
Blue Hammertone	PC33
Graphite	PC34
Blue Gloss	PC36
Army Green	PC37
Brown Gold	PC40
Putty	PC41
Vermillion Red	PC42
Vert Clair	PC43
Buff	PC44
Dark Blue	PC46
Dark Red	PC48
Chalk Pink	PC60
Custom Powder Coat	PCXX
Mottled Brass	PF11
Satin Nickel	PF12
Polished Chrome	PF13
Polished Copper	PF14
Warm Bronze	PF15
Polished Black Nickel	PF16
Satin Brass	PF17
Custom Plated Finish	PFXX



COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35



INPUT / CONTROL / POWER

110-120V Input TRIAC / ELV / 0-10V, 1% dimming	120_TM_DEX
220-240V Input 0-10V, 1% Dimming	220_10_DEX
110-277V Input 0-10V, 0.1% dimming	277_10_DEX
110-277V Input DALI, 0.1% dimming	277_DL_DEX

Drawings

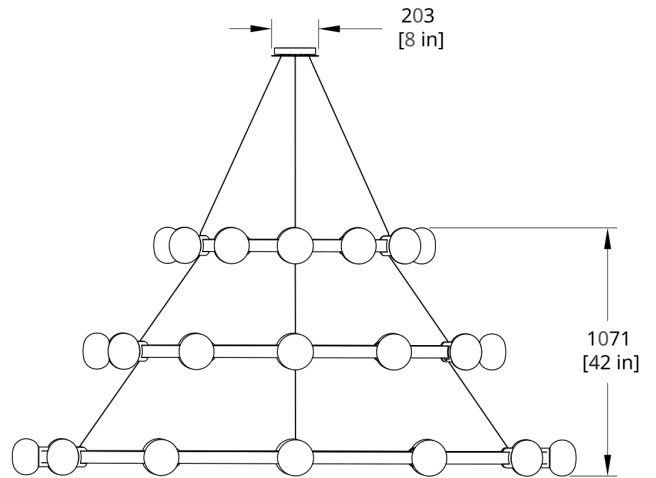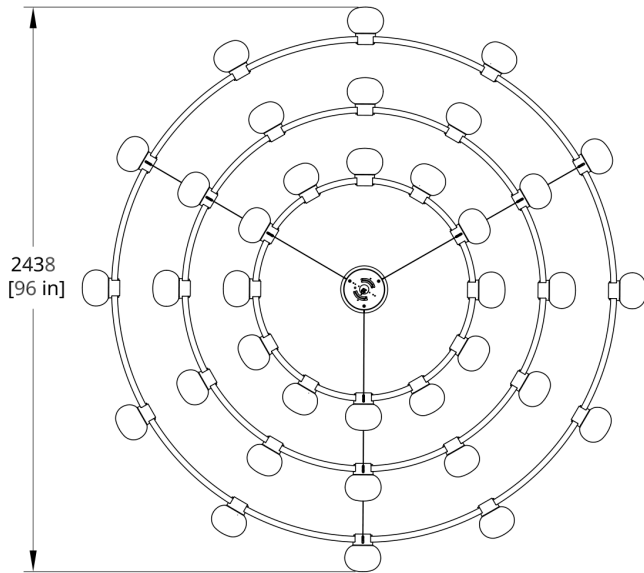

C468-121212 Cinema Chandelier Dimension

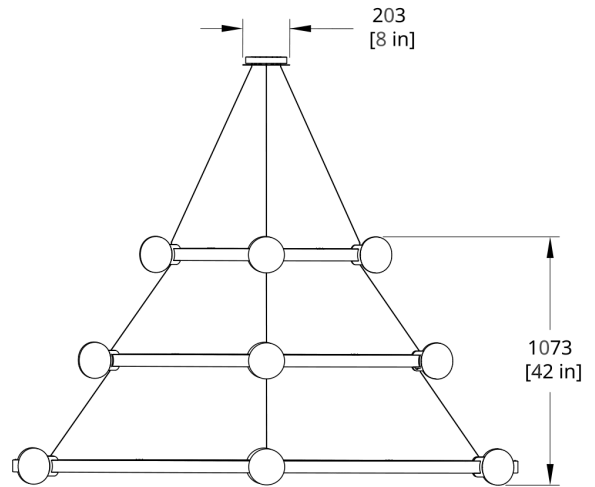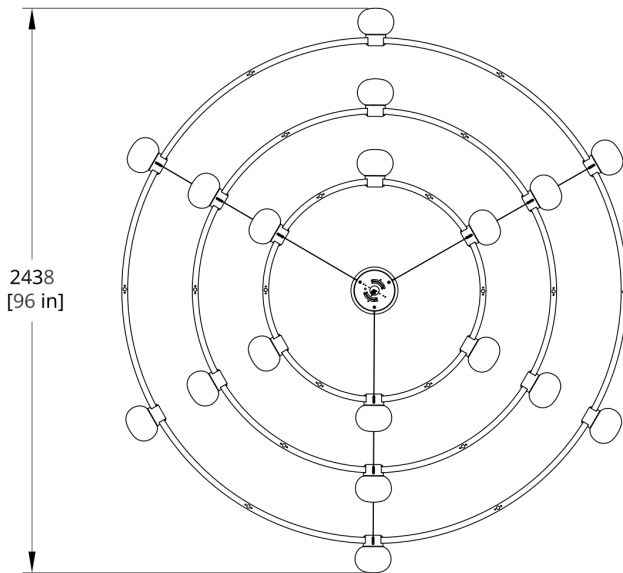

C468-666 Cinema Chandelier Dimension