


# AllSew

Pendants



50 Greene St  
New York NY 10013  
T +1 212 388 1621  
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit [rbw.com](http://rbw.com)

Generate Date: Tue Dec 21 2021

**DESCRIPTION**

Allsew, our modular, scalable pendant inspired by the luminosity of lanterns, and the lightweight, collapsible efficiency of kites.

**MATERIALS**

Sailcloth, fiberglass, aluminum

**PERFORMANCE**

36" Shade: 3660 lm; 48" Shade: 3731 Lumens

Power Consumption 39W

Luminaire Watts 39W

96 lm/w

90 CRI

**LED LIFESPAN**

50k hours

**PATENT FILE NUMBER**

Patent Number D908,932

**CERTIFICATION**

UL Listed

Suitable for Damp Locations

**SUSPENSION**

White 5" square deep canopy

Standard 72" white cord or 28" white stem. Standard Hang Height 66" for cord or 28" for stem. Minimum Hang Height 6" for cord or 14" for stem

Cord extension available (up to 150"), stem extension available. Cord is field trimmable, stem is not field trimmable.

**PRODUCT DIMENSIONS**

36" Shade: 36 x 36 x 30 in; 48" Shade: 48 x 48 x 30 in

**DIMENSIONAL WEIGHT**

15 lbs

---

**YOUR PRODUCT CODE**

ALP-W- [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

---

Specification Logic

**SIZE**

---

36"	36
48"	48

**FRAME CONNECTOR FINISH**

---

Matte White	PC20
-------------	------

**MOUNTING**

---

Cord	CO
Stem	ST

**COLOR TEMPERATURE**

---

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

**INPUT / CONTROL / POWER**

---

110-120V Input TRIAC / ELV / 0-10V, 1% dimming

120\_TM\_DIN

220-240V Input 0-10V, 1% dimming

220\_10\_DIN


110-277V Input 0-10V, 0.1% dimming

277\_10\_DEX


110-277V Input DALI, 0.1% dimming

277\_DL\_DEX



Drawings

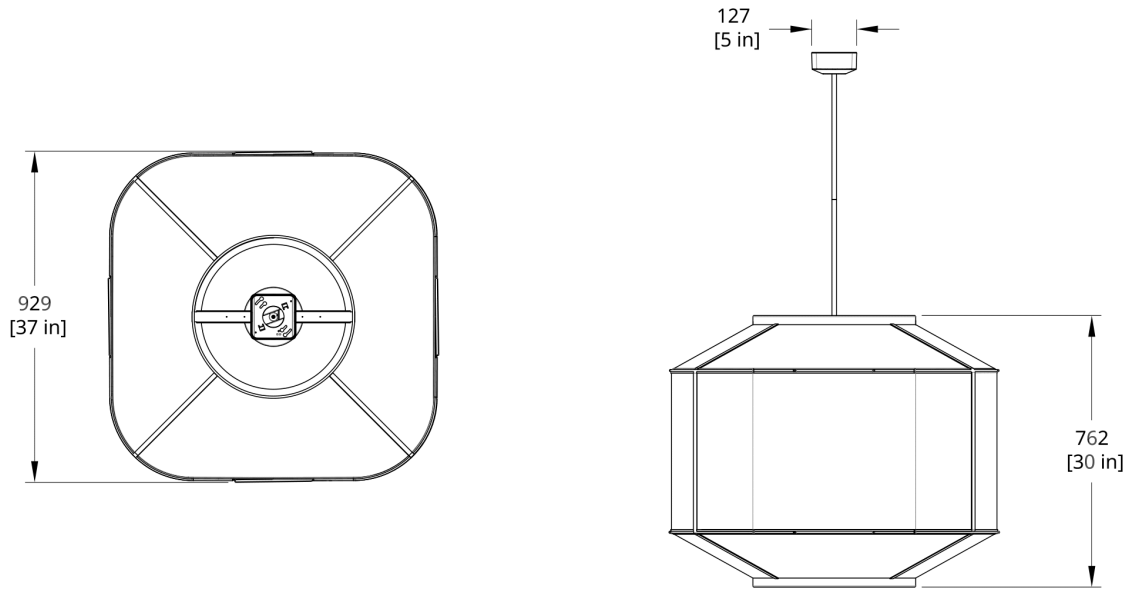



ALP-36-ST AllSew Pendant 36" Stem Dimension

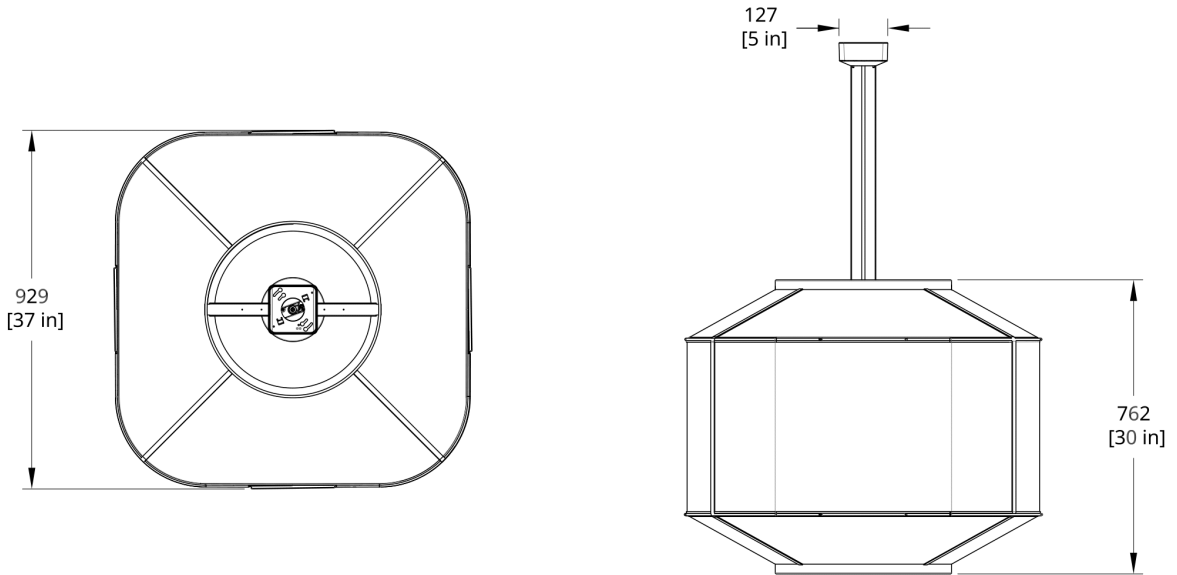

ALP-36-CO AllSew Pendant 36" Cord Dimension

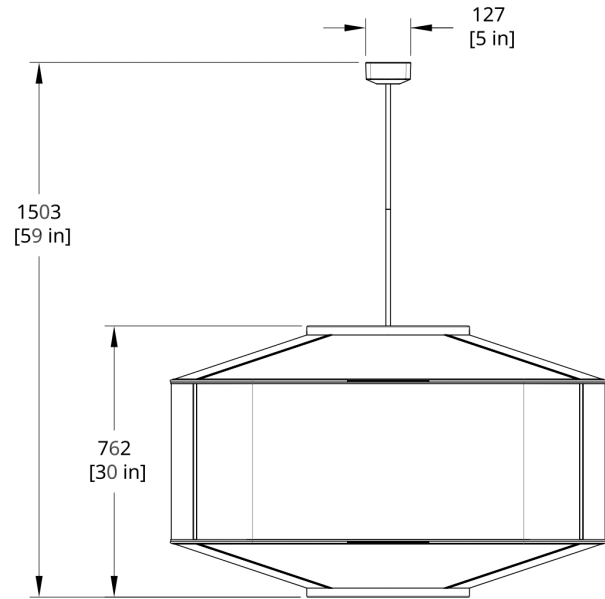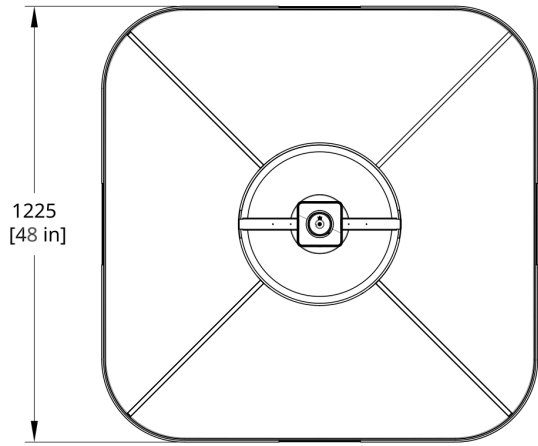

ALP-48-ST AllSew Pendant 48" Stem Dimension

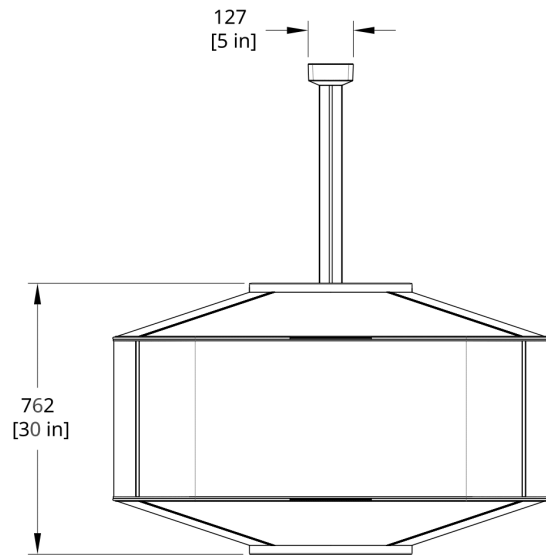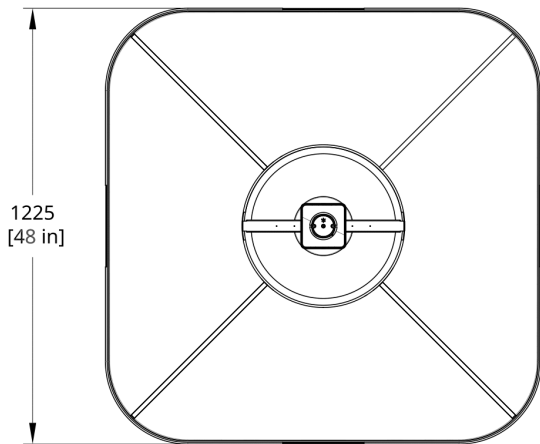

ALP-48-CO AllSew Pendant 48" Cord Dimension