


Centro Pendant Direct Indirect



Pendants

50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com



DESCRIPTION

Centro, a sleek, circular fixture for both flushmount and pendant installation. With its slim profile and light-diffusing perforated edge, Centro possesses a subtle sophistication other fixtures don't.

MATERIALS

Powder coated steel, acrylic diffuser

PERFORMANCE

3985 lm

Power Consumption 51.5W

Luminaire Watts 30W

78lm/W

90 CRI

LED LIFESPAN

50k hours

CERTIFICATION

UL Listed

CE

Suitable for Damp Locations

**SUSPENSION**

White 5" round flat canopy

Standard 72" cable. Standard Hang Height 65". Minimum Hang Height 30"

Cable extension available (up to 420"). Field trimmable

PRODUCT DIMENSIONS

18" dia x 6 in H

PRODUCT WEIGHT

10 lbs / 4.6 kg

DIMENSIONAL WEIGHT

50 lbs

YOUR PRODUCT CODE

CTP-18-DI- - - - -

Specification Logic

PRIMARY FINISH

Matte White Fine Texture	PC20
Silk Grey	PC25
Ochre Yellow	PC26
Matte Black	PC30
Vermillion	PC42
Custom Powder Coat	PCXX



COLOR TEMPERATURE

2200K (candle light)	22
2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
4000K (cool white)	40

INPUT / CONTROL / POWER

110-277V Input 0-10V, 0.1% Dimming	277_10_DIN
110-277V Input DALI, 0.1% Dimming	277_DL_DIN
110-277V Input TRIAC, 1% Dimming	277_TR_DIN

Drawings

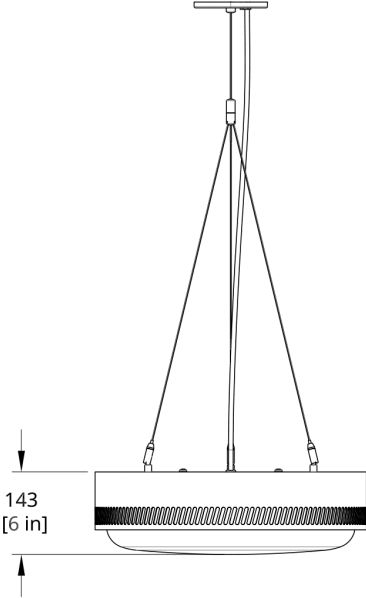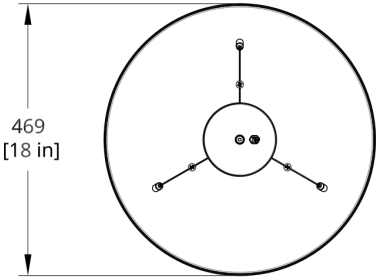

CTP-18-DI Centro Pendant Direct Indirect Dimension