
# Dimple Flush Mount

Ceiling Flush Mounts

50 Greene St New York NY 10013 T +1 212 388 1621 sales@rbw.com



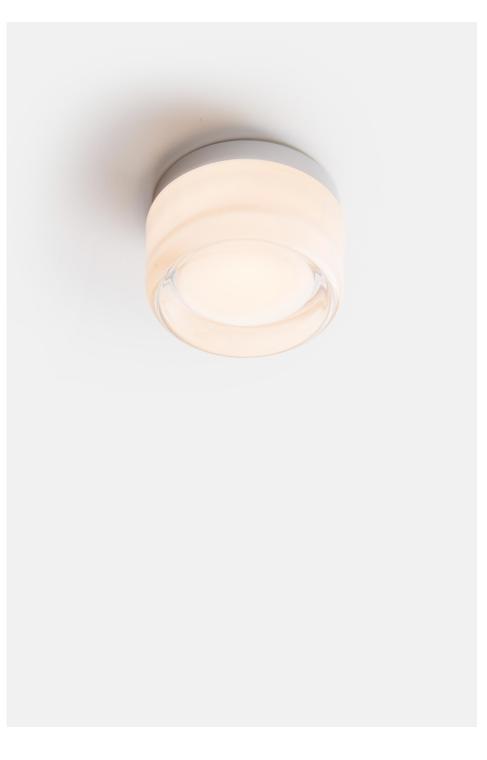

For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

#### DESCRIPTION

Originally designed in collaboration with Sister City, Dimple is a compact and dimmable, flush-mounted sconce that casts a diffuse and soft, atmospheric light. It is cheekily named for the thick, domed circular diffuser embedded into its front face.

#### MATERIALS

Cast solid glass, aluminum

# COLLECTION NOTES

Luminaire lumens listed are for AC input Triac control. DC input are within photometry downloads.

## PERFORMANCE

280 lumens (Frosted) | 240 lumens (White) | 120 lumens (Smoke) | 164 lumens (Amber) Power Consumption 8.5W Luminaire Watts 7.3W (AC Input) 38 lm/w (Frosted) | 33 lm/w (White) |17 lm/w (Smoke) | 23 lm/w (Amber) 90 CRI

## LED LIFESPAN

50k hours

# CERTIFICATION

ADA Compliant
UL Listed
Suitable for Wet Locations
Suitable for Damp Locations
IP20
IP65



## PRODUCT DIMENSIONS

5" Dia. x 3" Depth

#### PRODUCT WEIGHT

3 lbs / 1.63 kg

2 lbs

# YOUR PRODUCT CODE



# Specification Logic

#### GLASS FINISH

White	S1
Smoke	S2
Amber	S3
Frosted	S4

#### BACKPLATE FINISH

Natural Anodized	AA01
Black Anodized	AA04


#### COLOR TEMPERATURE

2200K (candle light)	22
2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

110-120V Input TRIAC Control 10% Dimming	120_TR_LINE
110-120V Input TRIAC / ELV / 0-10V, 1% Dimming	120_TM_DEX
220-240V Input 0-10V, 1% Dimming	220_10_DEX
220-240V Input ELV Reverse Phase, 1% Dimming	220_ELV_DEX
220-240V Input TRIAC / Forward Phase, 1% Dimming	220_TR_DEX
110-277V Input 0-10V, 0.1% Dimming	277_10_DEX
110-277V Input DALI, 0.1% Dimming	277_DL_DEX

# IP RATING

IP20 Rated	IP20
IP65 Rated	IP65

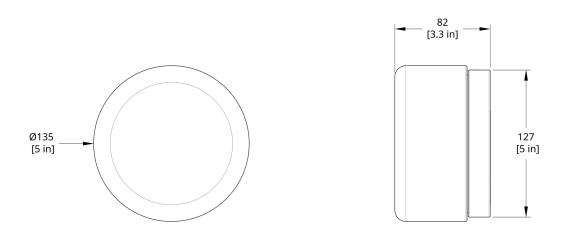

DP-WS Dimple Sconce Dimension (Rotate 90 degrees for flush mount version)