


Vitis 5

Chandeliers



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

Generate Date: Tue Dec 28 2021

DESCRIPTION

Designed so that no two installations are exactly alike, Vitis, is a draped modular statement chandelier with endless customizable possibilities. Its flexible, translucent cables accommodate blown-glass orbs at various heights, giving the appearance of lights floating in space.

MATERIALS

Blown glass globes, anodized aluminum clasps, woven cord

COLLECTION NOTES

Vitis comes with 120 in/ 3048mm cord between globes. Custom length available upon request.
Power enclosure comes with every order.

PERFORMANCE

905 lumens (Ivory); 715 lumens (Smoke)
Power Consumption 7W
Luminaire Watts 32.5W
Per Globe - 28 lm/w (Ivory); 22 lm/w (Smoke)
90 CRI

LED LIFESPAN

50k hours

PATENT FILE NUMBER

Patent Number D930,226, 187450, 201912511, 006433652-0001

CERTIFICATION

UL Listed
Suitable for Damp Locations

**SUSPENSION**

White 6" round flat canopy, 6" mud-in (recessed) canopy, and 6 clasps included
Standard 132" cord between globes. Recommended Hang Height 66", refer to dimensional drawings for more info
Not field trimmable

Generate Date: Tue Dec 28 2021

PRODUCT DIMENSIONS

Dimension will vary base on selected configuration. Please download Tech Pack for details.

DIMENSIONAL WEIGHT

88.4 lbs

YOUR PRODUCT CODE

VS-5-IV-CB-AA01-27-120_TR_DEX

Specification Logic

GLASS FINISH

Ivory	IV
Frosted Smoke	SM

CORD FINISH

Black Cord	CB
White Cord	CW
Custom Color Cord	CX

CLASP FINISH

Natural Anodized	AA01
White Gold Anodized	AA02
Black Anodized	AA04
Custom Powder Coat	PCXX
Polished Chrome	PF13

Generate Date: Tue Dec 28 2021


COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35


INPUT / CONTROL / POWER

110-120V Input Triac, 1% dimming	120_TR_DEX
220-240V Input 0-10V, 1% dimming	220_10_DEX
220-240V Input ELV Reverse Phase, 1% dimming	220_ELV_DEX
220-240V Input Triac / Forward Phase, 1% dimming	220_TR_DEX
110-277V Input 0-10V, 0.1% dimming	277_10_DEX
110-277V Input Dali, 0.1% dimming	277_DL_DEX


Drawings

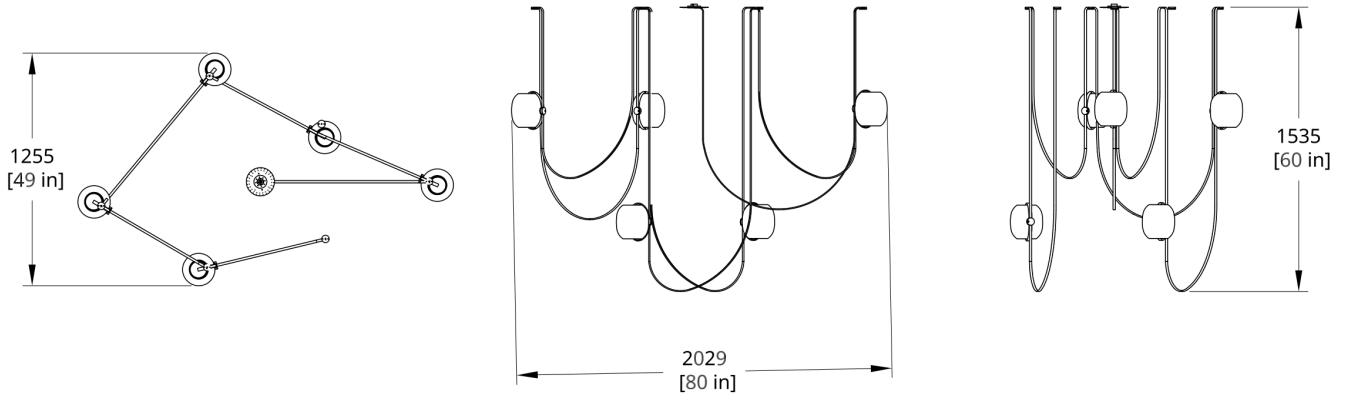


VS-5 Vitis Chandelier (Condensed) Dimension

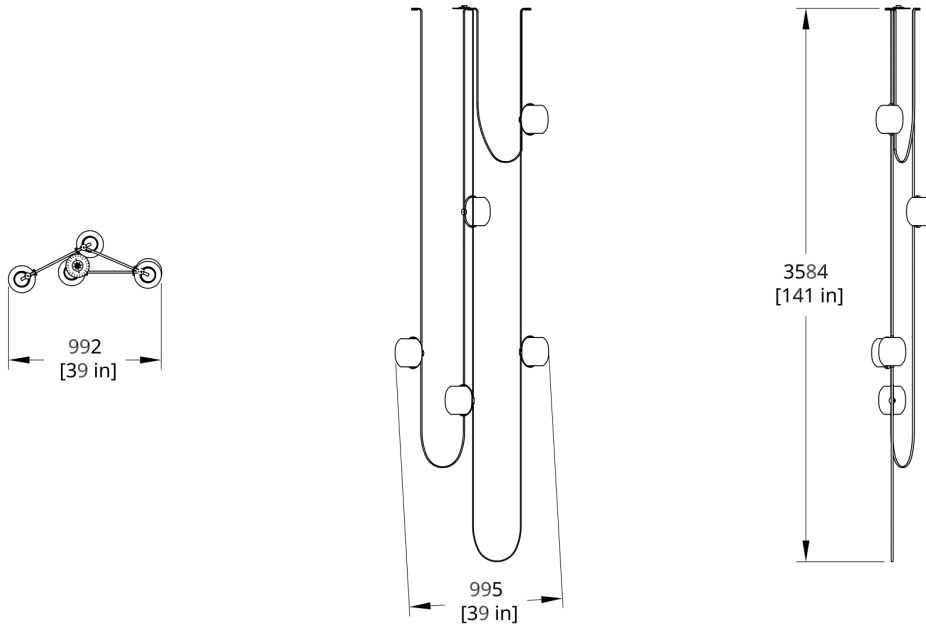

VS-5 Vitis Chandelier (Extra Long) Dimension

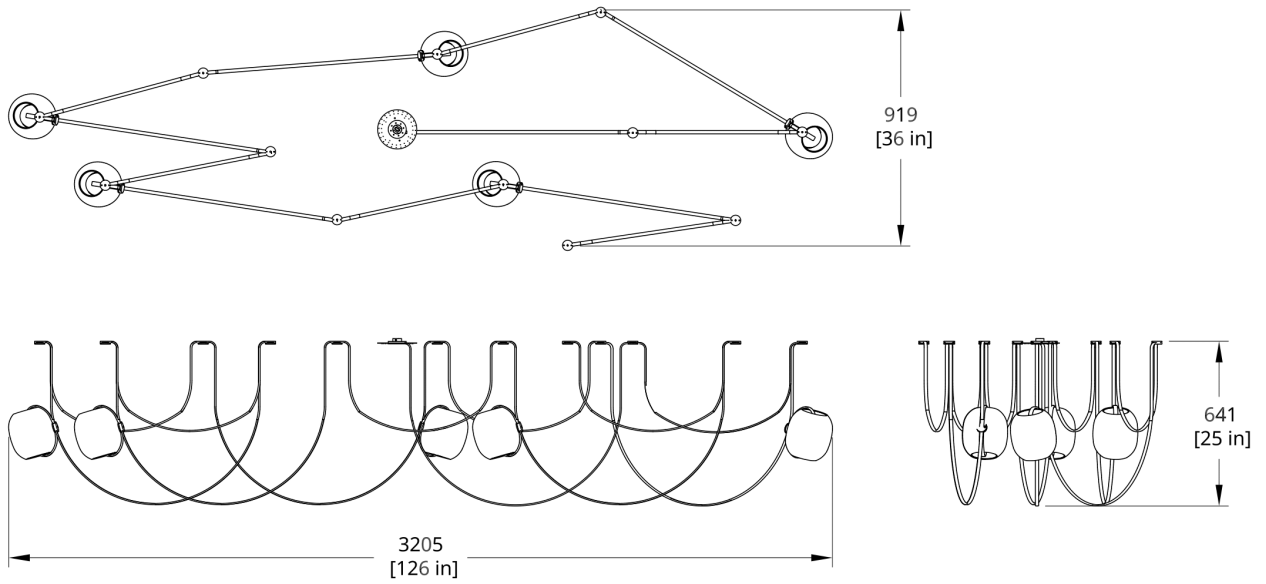

VS-5 Vitis Chandelier (High) Dimension

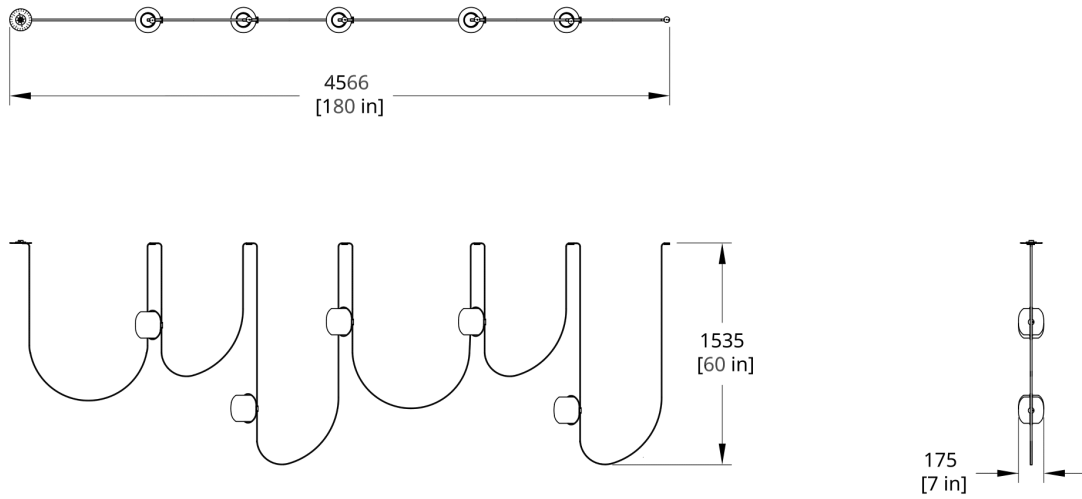

VS-5 Vitis Chandelier (Linear) Dimension