

Akoya

Pendants



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

Generate Date: Tue Dec 21 2021

DESCRIPTION

Akoya's perforated shade shell proudly reveals a glass pearl bulb. This pendant light drops elegantly, exuding a warm LED glow and is best above a dining table, or strung together in a row.

MATERIALS

Hand blown opal glass, Perforated metal

PERFORMANCE

440 lm

Power Consumption 8.7W

Luminaire Watts 8.7W

50.5 lm/w

90 CRI

LED LIFESPAN

50k hours

PATENT FILE NUMBER

Patent Pending

CERTIFICATION

UL Listed

Suitable for Damp Locations

**SUSPENSION**

White 5" round flat canopy (Contact your sales rep for more info)

Standard 72" white cord (paired with 14" shade) or 28" white stem (paired with 21" shade). Standard Hang Height 66" for cord or 28" for stem. Minimum Hang Height 6"

Cord extension available (up to 150"), stem extension available. Field trimmable

PRODUCT DIMENSIONS

14" Shade 14 x 9 in H | 22" Shade 22 x 12 in H

PRODUCT WEIGHT

10 lbs / 4.5 kg

DIMENSIONAL WEIGHT

8 lbs (14" Shade) | 9 lbs (22" Shade)

YOUR PRODUCT CODE

AK- [] - [] - [] - [] - [] - []

Specification Logic

SIZE

| | |
|-----------|-----|
| 14" shade | M14 |
| 22" shade | M22 |

SHADE FINISH

| | |
|--------------|------|
| Matte White | PC20 |
| Silk Grey | PC25 |
| Ochre Yellow | PC26 |
| Emerald | PC28 |
| Matte Black | PC30 |
| Vermillion | PC42 |


COLOR TEMPERATURE

| | |
|-----------------------|----|
| 2200K (Candle Light) | 22 |
| 2700K (warm white) | 27 |
| 3000K (soft white) | 30 |
| 3500K (neutral white) | 35 |


INPUT / CONTROL / POWER

| | |
|--|-------------|
| 110-120V input Triac Control 10% dimming | 120_TR_LINE |
| 110-120V Input Triac / ELV / 0-10, 1% dimming | 120_TM_DEX |
| 110-277V Input Triac, 5% Dimming | 220_10_DEX |
| 220-240V Input ELV Reverse Phase, 1% dimming | 220_ELV_DEX |
| 220-240V Input Triac / Forward Phase, 1% dimming | 220_TR_DEX |
| 110-277V Input 0-10V, 0.1% dimming | 277_10_DEX |
| 110-277V Input Dali, 0.1% dimming | 277_DL_DEX |

Drawings

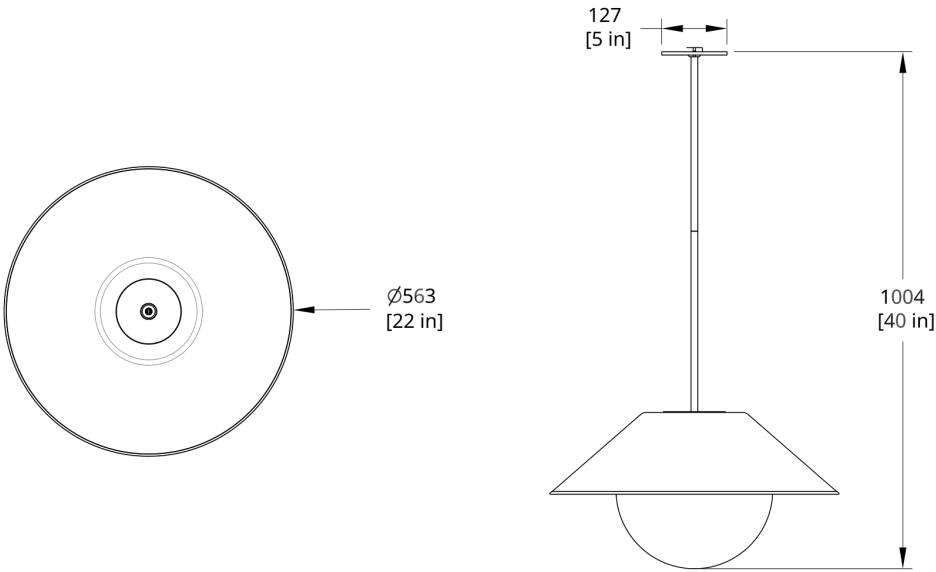

AK-M22 Akoya Pendant 22" Stem Dimension

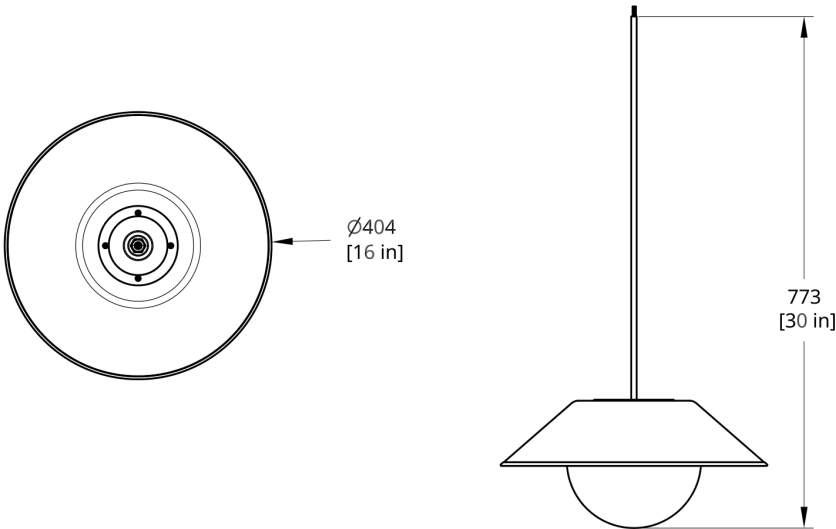

AK-M14 Akoya Pendant 14" Cord Dimension