



# Latis Zig Zag

Pendants



50 Greene St  
New York NY 10013  
T +1 212 388 1621  
sales@rbw.com

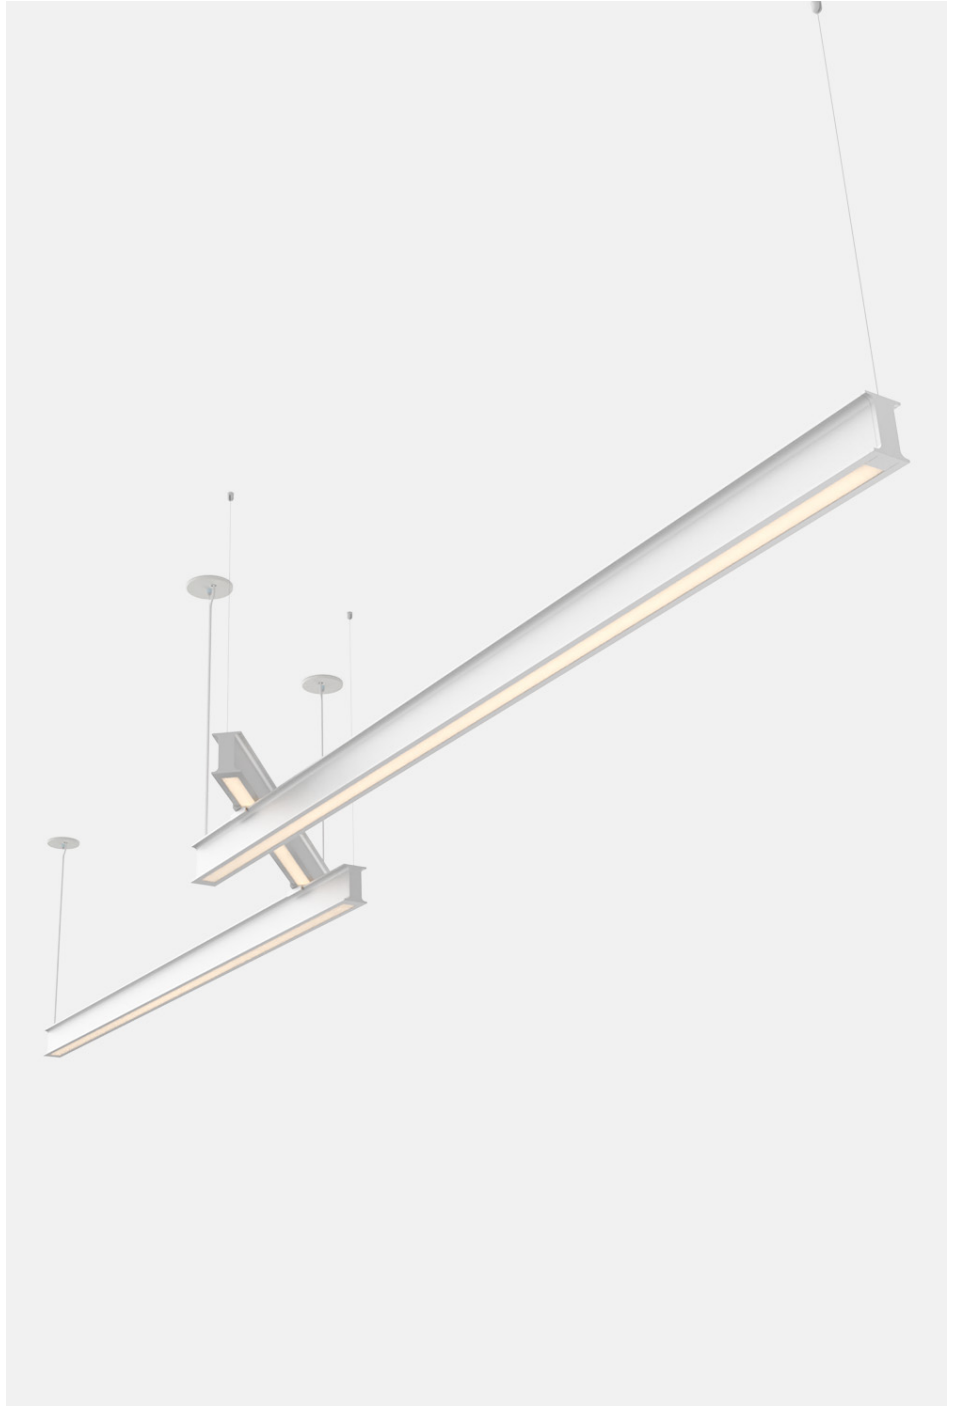

For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit [rbw.com](http://rbw.com)

Generate Date: Tue Jan 04 2022

## DESCRIPTION

Engineered with versatility in mind, Latis's intelligent, fail-safe design easily adapts to a wide range of spaces, looks, and architectural conditions. Evocative of a structural I-beam, its deceptively minimalist profile packs robust performance capabilities into RBW's new optic platform.

## MATERIALS

Extruded aluminum, extruded acrylic lens

## COLLECTION NOTES

In addition to the (2) fixed hang points, each linear run comes with (1) flexible, sliding hang point. Please let your sales rep know if your project requires additional sliding hang points.

Looking for higher lumen output? We are happy to discuss how we can meet your project needs.

For pricing on large quantity orders, please contact [sales@rbw.com](mailto:sales@rbw.com).

## PERFORMANCE

4'-8'-4': 11,300 lm | 8'-4'-8': 14,200 lm | 8'-8'-8': 17,000 lm

Power Consumption 4'-8'-4': 144W | 8'-4'-8': 180W | 8'-8'-8': 216W

Luminaire Watts 4'-8'-4': 144W | 8'-4'-8': 180W | 8'-8'-8': 216W

78.7 lm/W

90 CRI

## LED LIFESPAN

50k hours

## PATENT FILE NUMBER

Patent Number 202015830, 008211791-0001, GB90082117910001

## CERTIFICATION

UL Listed



**SUSPENSION**

White 5" round flat canopy per linear unit

Standard 72" cable. Standard Hang Height 66". Minimum Hang Height 6"

Cable extension available (up to 150"). Field trimmable

**PRODUCT DIMENSIONS**

Dimensions vary for this Product. Please refer to tear sheet dimension drawing.

**PRODUCT WEIGHT**

30 lbs / 13.6 kg

**DIMENSIONAL WEIGHT**

Dimensional weight pending

---

**YOUR PRODUCT CODE**

LS3- [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

---

Specification Logic

**SIZE**

---

4'-8'-4'	484
8'-4'-8'	848
8'-8'-8'	888

**PRIMARY FINISH**

---

Natural Anodized	AA01
Black Anodized	AA04
Blue Anodized	AA07
Matte White	PC20
Chalk Pink	PC60
Custom Powder Coat	PCXX

**DIRECT LIGHT**

---

Asymmetric	DASY
Diffuse Lens	DDIF
Narrow Beam	DNB
No Direct	DNO

**INDIRECT LIGHT**

---

Asymmetric	IASY
140 Batwing	IBAT
Diffuse Lens	IDIF
Narrow Beam	INB
No Indirect	INO

**COLOR TEMPERATURE**

---

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
4000K (cool white)	40

**INPUT / CONTROL / POWER**

---

110-277V Input 0-10V, 1% dimming	277_10_DIN
110-277V Input Dali, 0.1% dimming	277_DL_DIN

**SENSOR**

---



Integrated Enlighted Sensor (Need consultation with lighting designer)

ENL



Without Sensor

NO\_S




Drawings

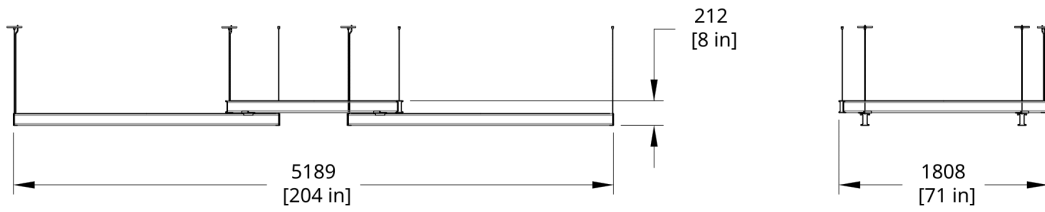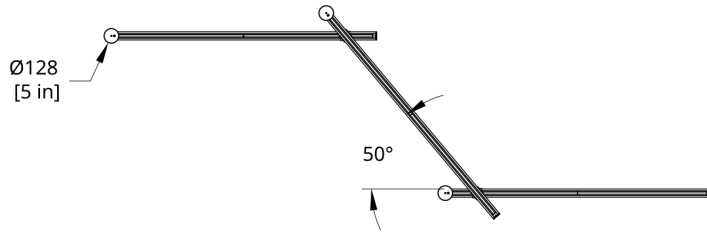

LS3-888 Latis Zig Zag 8-8-8 (Style 50) Dimension

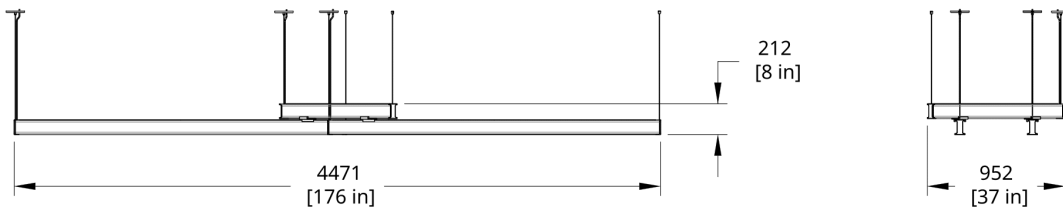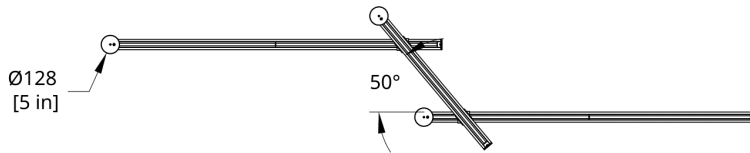

LS3-848 Latis Zig Zag 8-4-8 (Style 50) Dimension

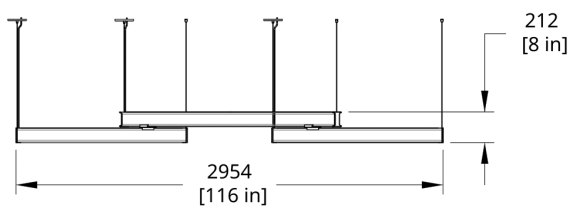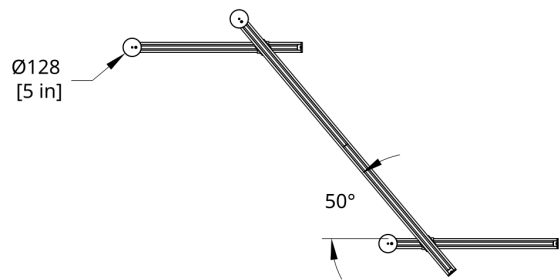

LS3-484 Latis Zig Zag 4-8-4 (Style 50) Dimension